



SANMOTION
SERVO SYSTEMS



PRODUCT INFORMATION

San Ace
COOLING SYSTEMS



SANUPS
POWER SYSTEMS

SANYO DENKI

SANYO DENKI Develops Products That Contribute to the Happiness of All People.

Contents

Product Overviewp. 3

Features

Cooling Systemsp. 6

Power Systemsp. 14

Servo Systemsp. 22

Product Lineup

Cooling Systems Products ...p. 30

Power Systems Products ...p. 36

Servo Systems Products ...p. 46

San Ace

Cooling Systems Products

Many of the devices that are essential to today's society, such as IT infrastructure like servers and communication equipment, medical inspection equipment, and control devices used in factories, require heat control solutions. Our San Ace cooling systems products are used to cool these devices to ensure their stable operation. SANYO DENKI's cooling fans are characterized by best-in-class performance, quality, and reliability, and they contribute to improving the performance and reliability of our customers' equipment.



SANUPS

Power Systems Products

The electronic devices and communication networks indispensable for our daily lives cannot be maintained without a stable power supply. Our SANUPS power systems products, including uninterruptible power supplies (UPS) and renewable energy inverters, supply high-quality and stable power to customers' equipment in the event of unexpected power outages as well as in normal situations. They can be used for disaster management and business continuity planning purposes as well.



SANMOTION

Servo Systems Products

Our motors and the amplifiers that drive them are required for "motion" of devices such as machine tools and industrial robots in factories, and medical equipment. Our products are best suited to applications that require accurate positioning and high performance. Our SANMOTION servo systems products contribute to improving the productivity of customers' equipment with high-precision and high-speed driving, as well as fine customization.



SANYO DENKI Products


Making Contributions in a Wide Range of Industries

Our products are the unsung heroes of society that work behind the scenes to support our lives. They are used all over the world, from convenience stores to factories, and contribute to people.



In hospitals

Our products are found in a variety of equipment including medical inspection and analysis equipment.



Dental X-rays

San Ace Fans

Cooling control boards

SANUPS UPS

Power backup in case of power outages

SANMOTION Servo Systems

Driving equipment while controlling speed and direction



Blood analyzers

San Ace Fans

Cooling PCBs

SANUPS UPS

Power backup of inspection equipment

SANMOTION Servo Systems

Rotating axis of specimen holders



In food factories

In food and semiconductor manufacturing factories, SANYO DENKI products are used to supply stable power to various units on automated production lines and the entire factory.



Air showers

San Ace Fans

Drawing in air through filters and blowing out cleaned air



Automatic labelers

SANUPS UPS

Power backup of the labeler and data PC in case of power outages

SANMOTION Servo Systems

Driving label tape rolls and conveyor belts



In convenience stores

Our products are found in store fixtures for heating and cooling goods and equipment for providing convenient services.



ATM

San Ace Fans

Cooling the housing and paper currency detector

SANUPS UPS

Power backup during power outages

SANMOTION Stepping Systems

Dispensing paper currency, conveying receipts and cards



POS registers

San Ace Fans

Cooling the CPU and power supply

SANUPS UPS

Power backup of registers and data

PCs



In IT systems

Our products ensure that servers, base stations, and other critical IT systems operate safely through cooling and power backup.



Servers

San Ace Fans

Cooling the housing and individual units

SANUPS UPS

Long-term power backup of data centers



5G base stations

San Ace Fans

Cooling the housing and individual units

SANUPS UPS

Power backup during power outages



In factories

Our products are used in robots, machine tools, and control devices, achieving factory automation (FA).



Palletizing robots

San Ace Fans

Cooling control panels

SANUPS UPS

Power backup of palletizing robots during outages

SANMOTION Servo Systems

Driving robots while controlling speed and trajectory



Machine tools

San Ace Fans

Cooling control panels and power supplies

SANUPS Voltage Dip Compensator

For protection from momentary outages or dips

SANMOTION Servo Systems


Workpiece feeding and shaft driving

Fans That Protect Society with Cooling

In IT equipment and industrial machinery, the importance of measures against heat generation is increasing as components generate more heat and equipment becomes more compact. This is where San Ace Cooling Systems, and fans in particular, come into play. Our high-performance fans contribute to the stability of social infrastructure by powerfully cooling equipment even in limited installation space, and protecting it from heat.



In telecom and TV fields

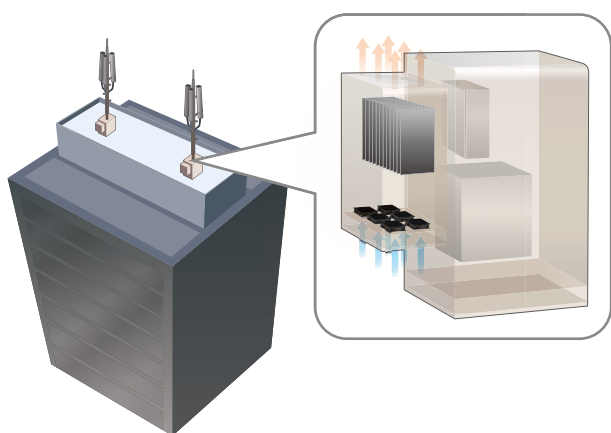

Wireless relay stations located on the rooftops of buildings transmit radio waves for mobile phones and TV broadcasts. For outdoor use, San Ace fans which feature high water resistance and long service lives are used.

In IT and advertising fields



In recent years, digital signage has become widely installed in restaurants and public facilities. Energysaving and low-noise fans are used.

Why they choose San Ace?

Point 1

High-reliability & high-performance design



San Ace was introduced in 1965 as the first fan produced domestically in Japan, and has continued to be developed while maintaining high reliability. We design and develop highly reliable and high-performance fans at our two Technology Centers in Ueda City, Nagano Prefecture, and Subic Special Economic Zone in the Republic of the Philippines.

All of our DC fans are equipped with ball bearings to stabilize the load during rotation and rotor covers to fix the magnets and impellers for high reliability and long life.

Point 2


High-quality production and manufacturing



In terms of production technology, we are also constantly developing technologies to provide high-quality products. For example, we manufacture our own original precision molds to achieve high-quality manufacturing in a short period of time. In addition, we use precise technology in our production procedures to correct balance and inspect all fans, which greatly affects their service life and reliability.

Point 3

Various proposals to satisfy customers' needs



We have a lineup of many unique products to solve our customers' problems, including fans with excellent environmental resistance such as Long Life Fans and Splash Proof Fans, and ACDC Fans that are driven by DC power with an AC input.

We also specialize in customizing existing fans with connectors and tubing to improve their durability for the environments in which they will be used. We have a variety of controllers to control fan speed and use them under optimal operating conditions, as well as measuring instruments to select the best fan for the equipment.

Point 4

Short Lead Time Service




A Short Lead Time Service is available for the prompt delivery of our products. Please contact your point of sale for details.



A variety of ways to use fans

Cooling


There are many ways to provide cooling.
San Ace has a rich lineup of compact models, so you can find a model that fits your equipment.

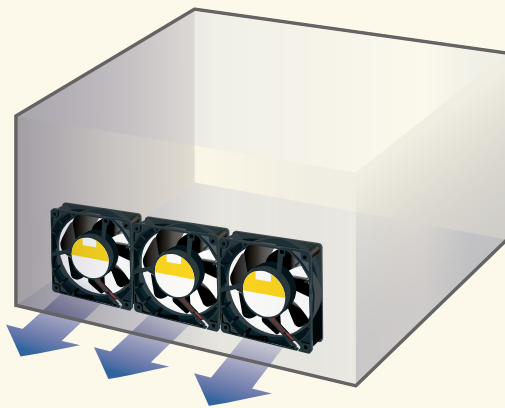

Cooling by exhaust

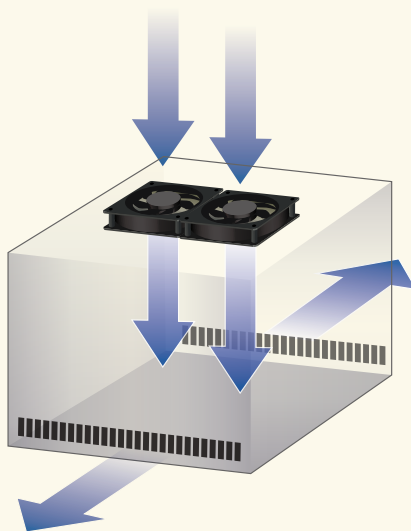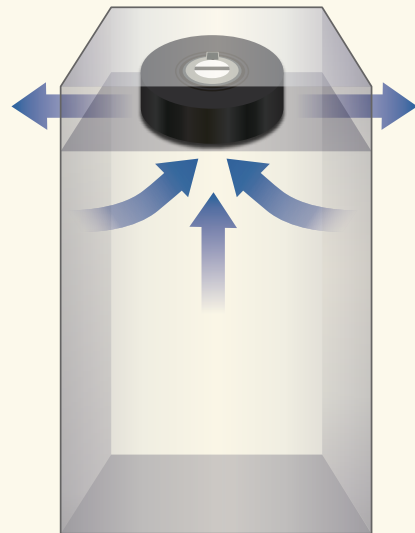

Cooling by intake

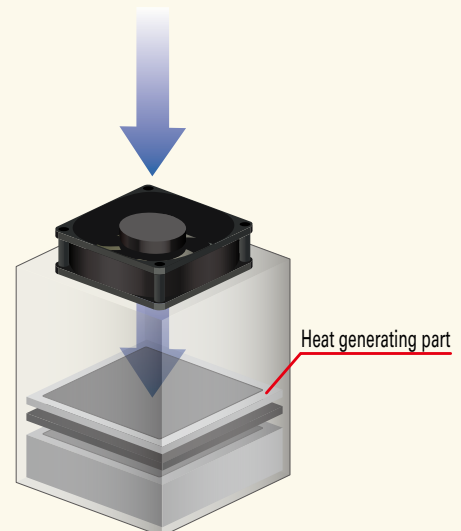

Cooling by blowing


★ You can narrow down fans by size and airflow with the **Advanced Search** on our Product Site.

<https://products.sanyodenki.com/en/sanace/search/>


Not just cooling

Air supply and circulation


They can be used for a variety of applications that require wind.

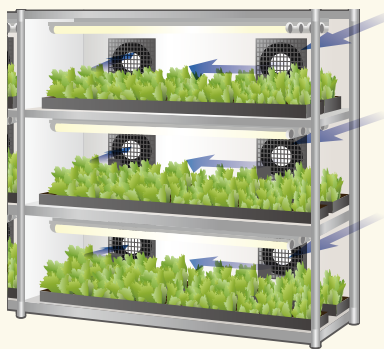

Air circulation
(Inside showcases, in plant factories, etc.)

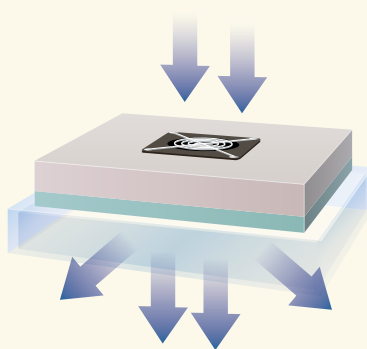


Sending air through filters
(in the ceilings of factories)

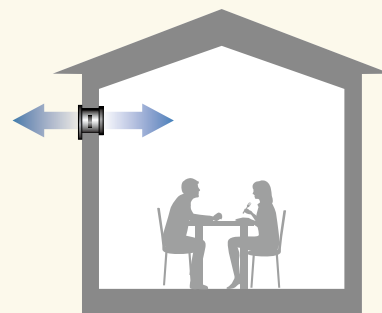


Indoor ventilation

Spraying and suction


Suitable fans can be selected to meet the required airflow.

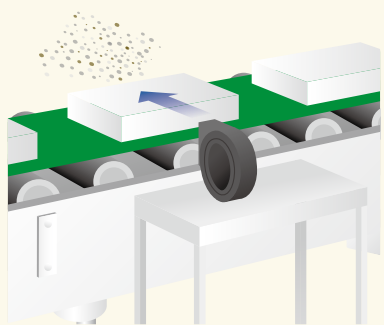


Contaminant removal
(Production line finishing and forming processes)

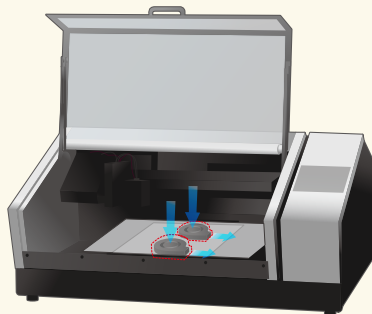

Holding paper by air suction
(Printers, copiers, etc.)

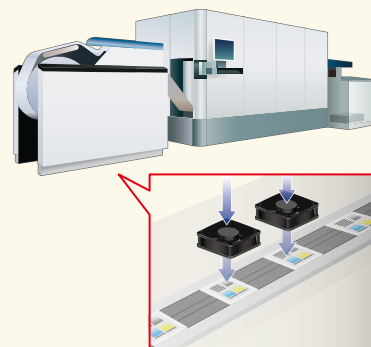

Using blasts of air for drying
(Printers, production lines, etc.)

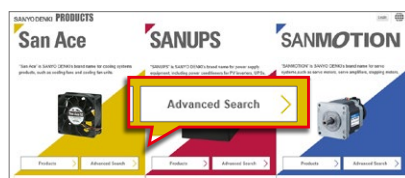

Problem

How to choose between axial fans, blowers, centrifugal fans, and other types of fans?

Solved!


Choose from a wide range of products to meet different needs

Axial Fan

Our rich lineup includes products with features such as high airflow and low noise. They are suitable for a variety of applications such as air blowing, ventilation, and local cooling.




Varied lineup

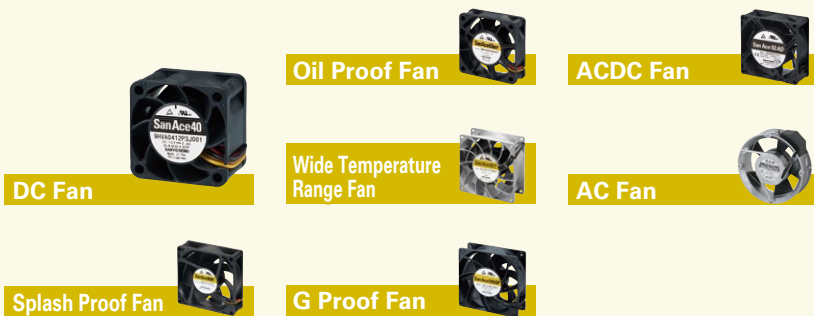

Counter Rotating Fan

The two impellers concentrate the wind flow into a straight direction. They are ideal for dense equipment that requires high airflow.

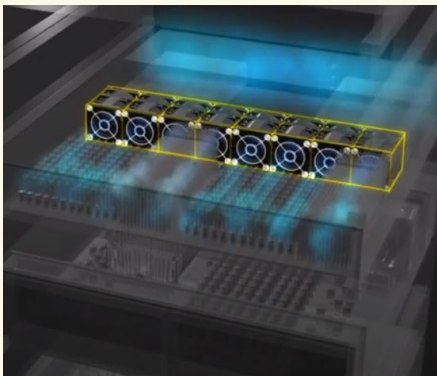


Example of use inside a server

Devices such as 1U servers have a very dense interior. This often requires multiple fans, but power consumption becomes a problem. Counter Rotating Fans provide efficient cooling and reduce power consumption.

Counter Rotating Fan mechanism

When two fans are used in series, the air will spread out like the wind from a household fan. A Counter Rotating Fan has two impellers that rotate in opposite directions to improve the flow of air and deliver wind in a straight direction.

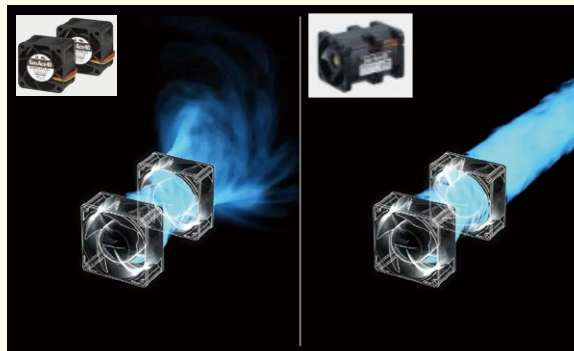


Reversible Flow Fan

A fan that can switch the airflow direction. Ideal for applications where changing the wind direction is needed.




In some cases, such as in house ventilation systems, multiple fans are used to blow air in both directions. For these cases, our Reversible Flow Fans can reduce the number of fans used, leading to cost reductions and space savings.

They are simple to control, and airflow and static pressure are almost the same in either direction.

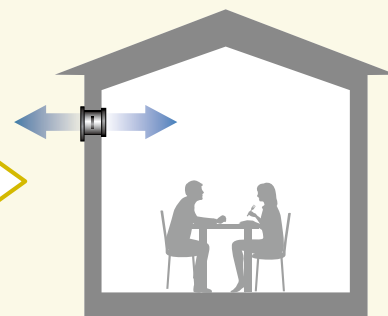


Centrifugal Fan

Since air is expelled in a 360° direction, exhaust vents can be designed freely. It is ideal for applications with large spaces and multiple heating elements.




Centrifugal Fans can change the flow of air by 90° and are most suitable for use when installing an exhaust vent on the side of equipment.

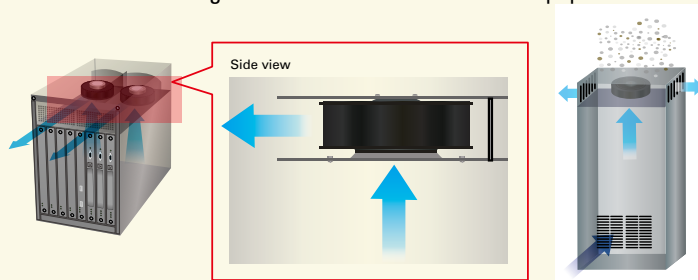


Applications:
ICT equipment, servers, storage, heat exchangers, air purifier systems

Blower

Can expel air at a right angle. High static pressure makes it ideal for local cooling and applications where air does not flow easily.




It is suitable for suction applications and local cooling because it can discharge air in a straight direction with high static pressure.

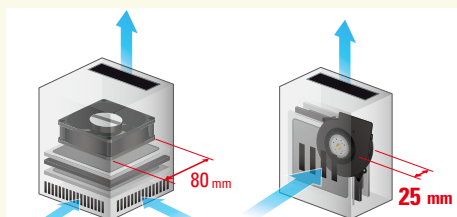

Systems can be designed thinner while providing the same cooling performance.

In applications like supplying air in ducts where high static pressure is required

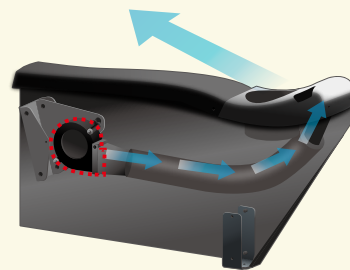

Applications:
Servers, storage systems, mobile communications base stations, applications where air must be blown into a narrow space

Problem

Outdoor equipment exposed to rain. Inspection is difficult!

Solved!

Splash Proof Fans provide high resistance to dust and water

Equipment installed outdoors such as communications base stations and EV chargers must be waterproof to withstand rain and humidity. Resistance to dust is also important in food factories and other environments where powder is scattered. Splash Proof Fans with up to IP68 water and dust resistance provide peace of mind.

• In addition, Splash Proof Long Life Fans have an 180,000 hour expected life.

Needs to be replaced three times
Compared to Splash Proof Fan of equivalent size,
maintenance labor time and cost can be reduced.

Splash Proof Fan 9WP0612H401	Expected life: 45,000 hours	Replacement	Expected life: 45,000 hours	Replacement	Expected life: 45,000 hours	Replacement	Expected life: 45,000 hours
Splash Proof Long Life Fan 9WLO612P4H001	Expected life: 180,000 hours						



Problem

Is there a fan that can be used safely in environments with high or low temperatures?

Solved!

Wide Temperature Range Fans can be used in a wide temperature range of -40°C to +85°C.

Wide Temperature Range Fans are suitable for many applications, from low-temperature refrigerators and freezers to high-temperature lighting equipment.

The fan's expected life is 40,000 hours at an ambient temperature of 85°C. It can contribute to extending the service life of devices.




Low-temperature Applications

- Freezers
- Wind power generator, EV quick chargers, and devices installed outdoors in cold regions



High-temperature Applications

- Projectors
- LED lighting
- Inverters
- LCD monitors



Problem

Want to select the best fan for your device?

Solved! The Airflow Tester portable measurement device makes selection easy

To cool equipment efficiently while reducing the power consumption and noise of the fan, it is important to measure the system impedance and operating airflow of the equipment to select the optimal fan. The Airflow Tester is a portable, double-chamber measurement device weighing only about 6 kg, which allows the easy and accurate selection of the optimal fan for a device.




Problem

Want to control the fan speed efficiently according to the ambient temperature?

Solved! Controller for easy control of rotational speed

The San Ace series includes two types of controller to control the speed of PWM fans. A single controller can control the speed of up to four fans.

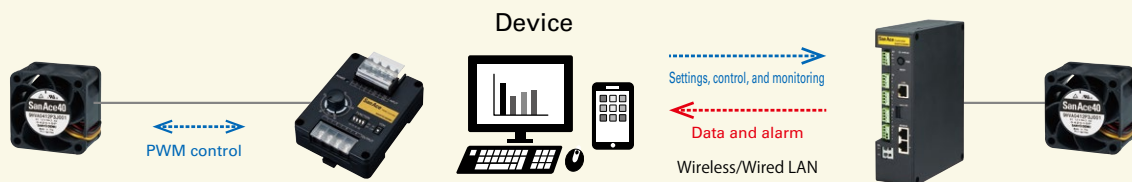

PWM Controller

Fans can be controlled to save energy and achieve low noise without needing to design circuitry to control the fan speed.

San Ace Controller

Monitoring and automatic/manual control of fans and sensors can be performed remotely via wireless or wired LAN. The IoT function allows for efficient fan use.


Problem

Finger guards might reduce airflow?


Solved! Our dedicated finger guards can be used with confidence with almost no performance difference.

Depending on the fan's mounting position, finger guards may be required. We offer metal finger guards and resin finger guards made in our own factories with high quality control.

They can be used with confidence, as there is almost no difference in fan performance when installed.



Does not significantly affect the airflow and static pressure performance of the fan when mounted.

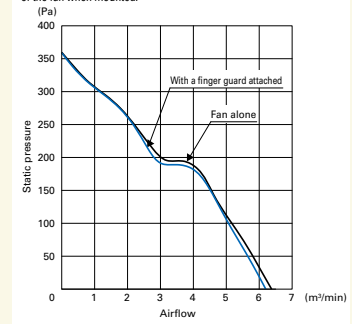

UPS That Protects Equipment and Society from Power Outages

As digitization and networking have become essential in every part of society, UPSs (uninterruptible power supply) are playing an important role in protecting people's lives by preventing critical data from being lost in power outages. Since our company developed our first UPS in 1961, we have developed and launched a number of highly reliable products. In addition to UPSs, our lineup has power conditioners for photovoltaic generation systems (PV inverters) and a grid management system that enables microgrids, contributing to society through the stable supply of power.



In data centers



In data centers, UPSs are widely used to protect critical data from power outages. We have a rich lineup of easy-to-use UPSs, such as ones with a highly reliable topology and ones suitable for mounting in server racks.

In medical clinics



Outage protection is vital for temperature control of specimen and chemical storage equipment. Our rich UPS lineup includes long-term backup models and compact, lightweight models available for safe use in hospitals.

Why they choose SANUPS?

Point 1

High reliability



All of our products have their origins in 1927, when we developed a radio power generator. Since then, we have been constantly developing highly reliable products that ensure a stable power supply. Our UPS lineup offers UPSs that feature various topologies, including ones that do not allow interruptions when transferring to battery power.

We also have a number of UPSs available that provide a fail-safe through a redundant configuration where even if one unit fails unexpectedly, the remaining ones can continue to supply power.

Point 2

Easy battery replacement




The batteries of our small-capacity UPSs are user-replaceable, reducing maintenance time and costs.


Applicable products: E11B, E11A, A11M, A11K, A11J

Point 3

Warranty for peace of mind



UPS batteries are warranted for one year. Moreover, for some products the warranty period can be extended to three years by registering the UPS. Within the period, customers can enjoy such benefits as free replacement batteries and battery replacement timing reminders.

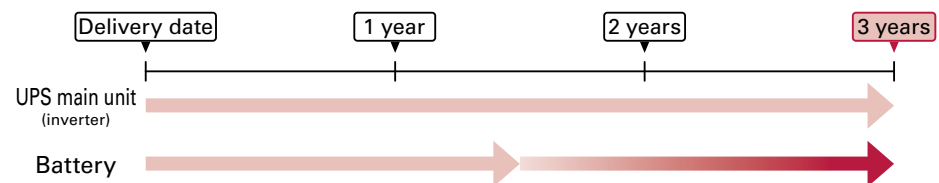


Applicable products: SANUPS E11B, A11M, A11K-Li

(Models with a backup time of 30 minutes or longer are only eligible when the product revision is B or later.)

Note that there are conditions that must be met to receive these benefits. Visit our website for more information. Find the information page by searching for 'SANYO DENKI UPS registration.'

Point 4

Maintenance services



To keep SANUPS products functioning at their best, we offer a variety of maintenance services such as repairs and periodic inspections where we provide replacement and repair parts.


SANUPS Products Provide Safe Power in These Applications

Protection from momentary outages/dips

UPS

Voltage Dip Compensator

Power failures occur unexpectedly

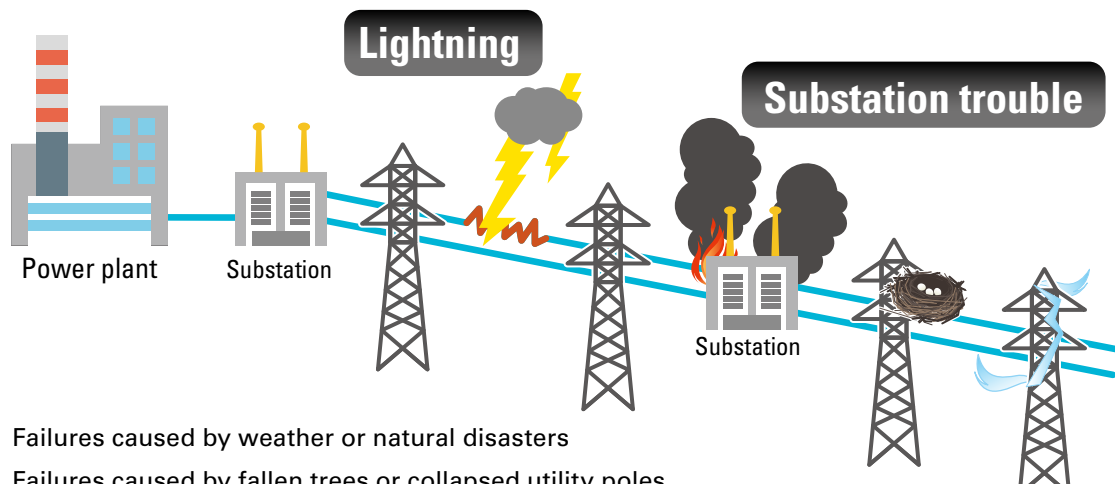

- Failures caused by weather or natural disasters
- Failures caused by fallen trees or collapsed utility poles
- Failures caused by cranes colliding with power lines

Contact with foreign objects


(trash, branches, etc.)

Protection from harmonics

UPS

Voltage Dip Compensator

Our UPSs and voltage dip compensators provide not only protection from power outages and dips, but also protection from harmonics generated by equipment such as plating machines and machine tools. Also, there is no need to purchase an active filter separately, contributing to cost reduction.

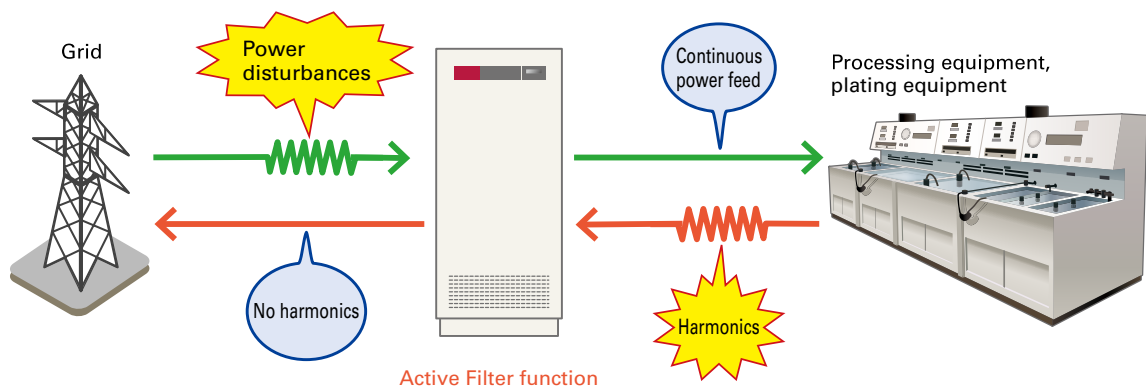

For BCP purposes


UPS

EDG+UPS

Long-term backup UPSs can be used not only to protect data loss from momentary power failures, but also for BCP (business continuity planning) purposes.

For example, using a model with a 400-minute backup time...

30 min*



Using a 1.5 kVA, 400-minute backup model...

1.2 kW	370 min**
120 w	48 hours
84 w	72 hours

For example...


Smartphone charging 5 w	Laptop 25 w
----------------------------	----------------

Model no.: S-A11KL152A0400TSN00

* An optional LAN Interface Card is required to set the battery backup time.
** Backup times are calculated with conditions of a 25°C ambient temperature, using new, fully charged batteries

Also, when an emergency diesel generator (EDG) is combined with a UPS...

Power will be supplied to equipment through the inverter. This system protects loads from power failures such as momentary voltage dips. In the event of a power outage, the UPS disconnects grid power and switches to the generator without interruption, continuing to supply power for a long period.

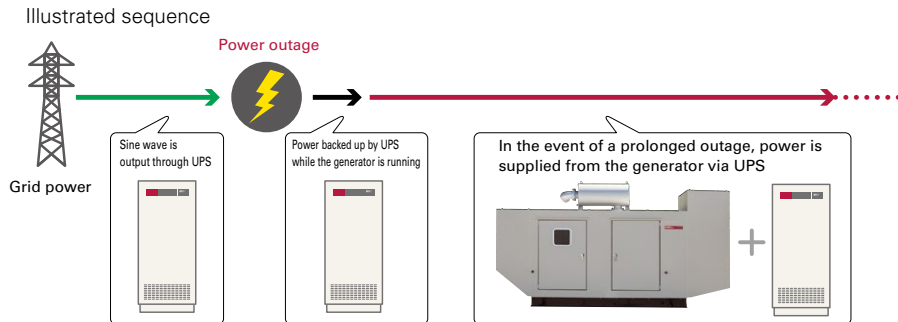

We also offer mobile power generation vehicles that can provide power whenever and wherever necessary. It may be difficult to install generators in multiple locations due to cost, space, and maintenance problems. A mobile power generation vehicle, however, can move to where it is needed.



What is a UPS?

A UPS (uninterruptible power supply) ensures that continuous power is supplied to a load even in the event of a power grid failure. Typically, a UPS consists of a rectifier that converts AC to DC power, an inverter that converts DC to AC power, and storage batteries. During a power failure, the inverter converts the DC power stored in the battery into AC power to power the load.

Without a UPS...


Power failure



- Electrical equipment stops abnormally
- Requires a long amount of time to restart electrical equipment and systems

With a UPS...

Power failure

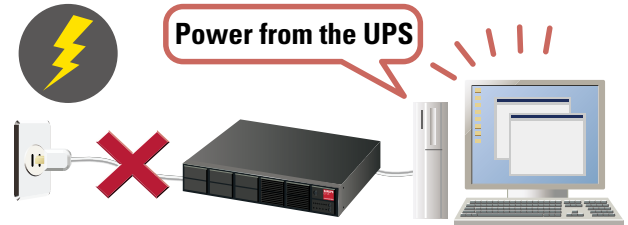


Our lineup has UPSs with the following topologies available to allow you to select the best UPS for your application.

■ Topology

Passive Standby

Product: N11B-Li, N11C-Li


This topology offers the lowest power conversion loss. Since there will be a momentary interruption, this UPS is suitable for applications such as surveillance cameras where a momentary interruption is not a problem.

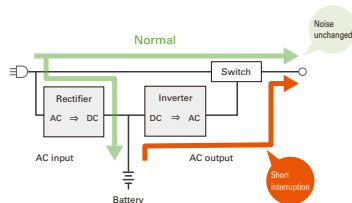

Hybrid

Product: E11B


UPSs featuring this topology automatically select the optimal mode of operation for any given input power conditions. They provide high-quality power and low power losses, and are suitable for elevators and the control part of machine tools.



Double Conversion Online

Product: A11J, A11M etc.


This topology continuously provides the best-quality power through the inverter. It also offers zero transfer time during outages. These UPSs are ideal for critical applications such as base stations and communication servers.



Parallel Processing

Product: E23A, E33A

This topology ensures that a bi-directional inverter corrects the power factor and absorbs noise, improving the quality of input power. It also offers zero transfer time during outages. These UPSs feature a high efficiency, and are suitable for industrial production equipment.



■ Installation method


Free-standing

Installation on the floor




Rack-mount

Suitable for 19-inch rack servers



Outdoors

For outdoor installation, UPSs with IP65-rated water and dust protection are also available.



■ Input voltage

In addition to 100 V and 200 V class models, we also have 400 V class models available in the lineup for use in factories and outside Japan. UPSs with a wide input range are also available.

★ You can narrow down UPSs with the **Advanced Search** on our Product Site.

<https://products.sanyodenki.com/en/sanups/search/ups/>



Always Use Clean Power

— Situations where power products are useful —


Problem

A UPS that can withstand the large startup current of FA equipment?

Solved!

Parallel processing UPSs are best suited to production equipment!

Equipment that has a motor experiences a large inrush current at startup. Our parallel processing UPSs feature a high overload capability of 800%, so you can focus on the rated capacity when selecting UPSs without worrying about startup currents. With no need to introduce a large-capacity UPS for the startup current, space saving can be achieved.

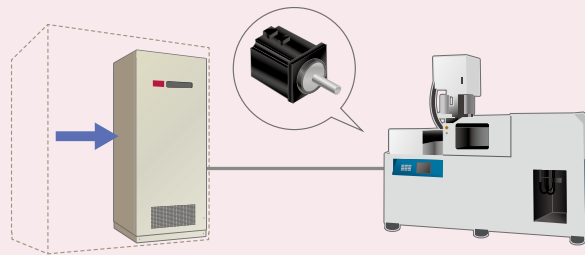

Problem

Need a power backup with the highest reliability for a critical system?

Solved!


Increased reliability with parallel redundant operation

By configuring power redundancy, highly reliable double conversion online UPSs can be made even more prepared for power problems.

- With extra capacity, a parallel redundant configuration is possible.
- Provides multiple layers of power protection for critical equipment.

Parallel redundant operation illustrated with A11J (figure on the right)

In an N+1 configuration, the UPS provides a fail-safe protection; in the event that one UPS unit fails, the remaining units can continue to provide power.

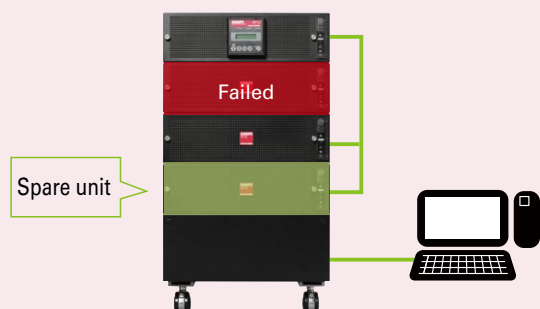

Problem

Need a long-term power backup for emergency management, but there's no space for generators!

Solved!

UPS with lithium-ion batteries can provide a long-term backup, and can be used for BCP purposes


UPSs with lithium-ion batteries can be used to protect from momentary dips at normal times, and also as emergency power in the event of a prolonged power outage.

Lithium-ion battery...

Provides a longer backup time than lead-acid batteries, and does not require replacement for 10 years.

Lead-acid battery...

Is a standard storage battery that is used in many of our UPSs, and has a life expectancy of 5 years.

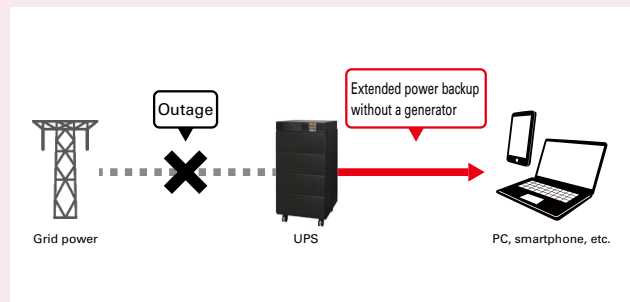


Problem

Need a way to manage many UPSs efficiently?


Solved!

A wide range of networking options for central system management

By combining a LAN interface card and management software for monitoring and managing multiple UPSs, your system can be managed centrally and efficiently. LAN Interface Card models with Modbus, a communication standard widely used in industrial equipment, are also available.

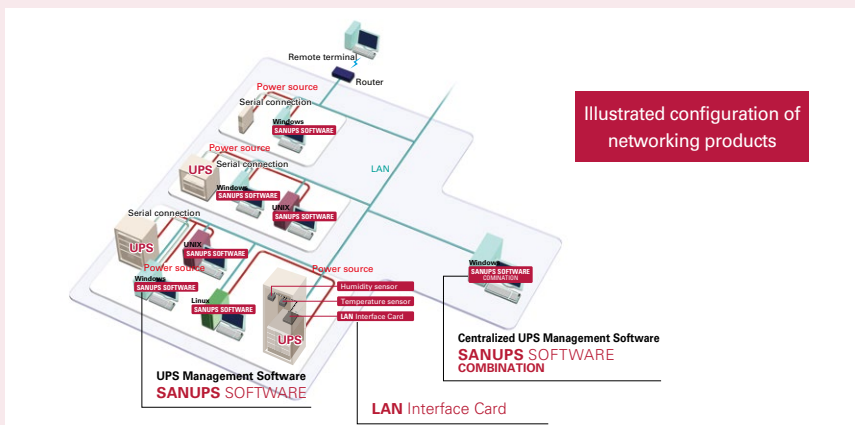

LAN Interface Card

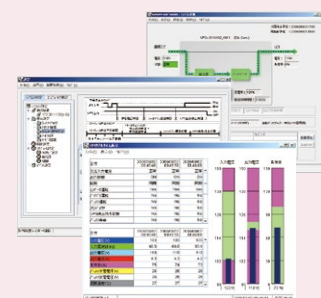

UPS Management Software SANUPS SOFTWARE

Problem

Want to make good use of renewable energy?

Solved!


With a power conditioner (renewable energy inverter), fluctuating renewable energy can be converted into stable power

Power conditioners (renewable energy inverters) convert the power generated from renewable energy, such as photovoltaic, wind, and hydro power generations, into a usable form of power.

With isolated operation capability, they can continue supplying power during times of emergency

We also have grid management devices available that control the power flow of systems that include distributed power sources, storage batteries, and hybrid type power conditioners that combine solar cells and storage batteries.

These devices enable efficient operation of such systems by efficiently using the power from renewable energy and storage batteries, contributing to BCP purposes.

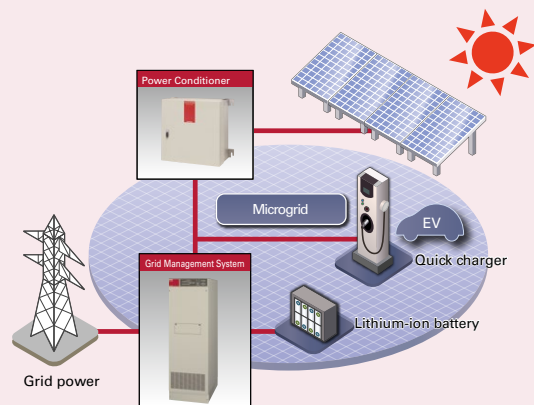

Problem

Need a solution for momentary power outages, but have a limited installation space?

Solved!

A voltage dip compensator with a built-in EDLC (electric double layer capacitor) provides protection


Our voltage dip compensator with a built-in EDLC requires less space than a UPS with lead-acid batteries.

In the event of a voltage dip or momentary outage of less than 1 second, the dip compensator ensures that loads will be powered with a pure sine wave without interruption. With a long-life EDLC, maintenance-free operation can also be expected.

Dip compensation time

1 s

During a momentary outage

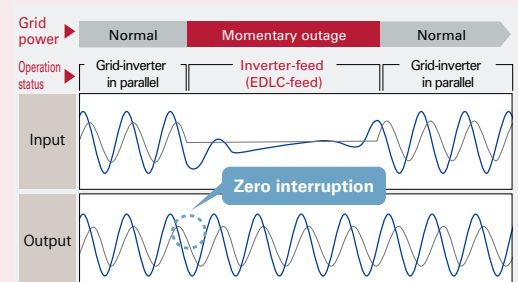


Motion, smoother and more precise

For FA equipment and industrial machinery that require high precision and accurate positioning. To ensure the stability of manufacturing and social infrastructure, it is vital for equipment to move precisely as instructed. SANMOTION has a rich lineup of motors with smooth driving and products that control them with high precision. The value of equipment is enhanced through sure motion and stopping.




In factories

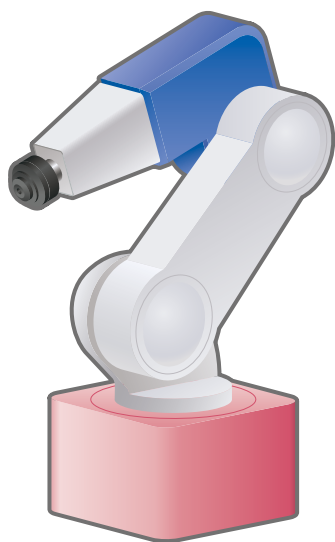

In an articulated robot on a production line, the smooth motion of the arm is achieved through the precise synchronized driving of multiple SANMOTION servo systems.

In medical clinics

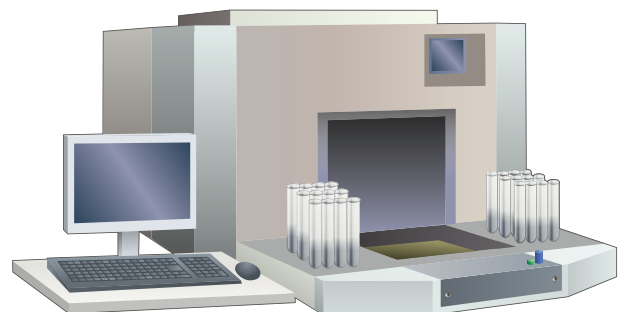


SANMOTION servo systems are used in a wide variety of equipment such as diagnostic, testing, and analysis devices, as well as electric beds used in hospital wards.

Why they choose SANMOTION?

Point 1

Highly reliable design, flexible customization



1952 Servo Motor Prototype

Since we developed the first domestic servo motors in 1952, we have been making high-quality servo systems and stepping systems. They are equipped with the high performance and quality that we have cultivated along with our technical history. We also offer flexible customization to best suit the customer's equipment.

Point 2

Rich lineup

We offer a wide lineup that includes motors with precise positioning, and amplifiers, drivers, and controllers for controlling them.



Stepping Systems

SANMOTION F2(2-Phase)
SANMOTION F3(3-Phase)
SANMOTION F5(5-Phase)



Closed Loop Stepping Systems

SANMOTION Model No.PB




AC Servo Systems

SANMOTION R



DC Servo Systems

SANMOTION K



SANMOTION

Linear Servo Systems




Motion Controllers

SANMOTION C

Point 3


Meticulous pre-sales service




Motor selection software

We offer software to assist you in selecting the best motor for your equipment. Also, our dedicated setup software makes it easy to set up systems. In addition, our technical assistance service can help improve the precision of your equipment.


Accurate Stopping and Smooth Motion



Camera swinging

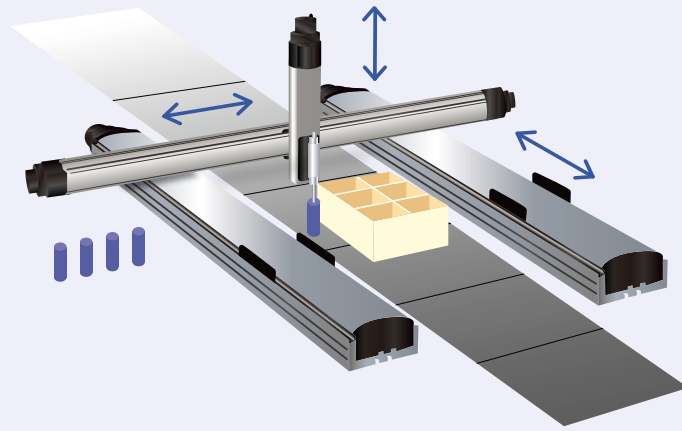


Pick-and-place

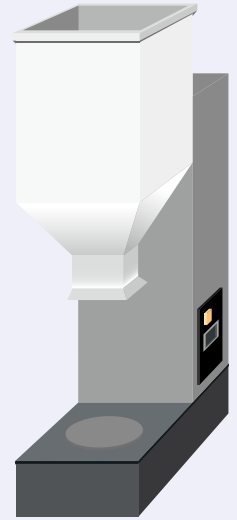


Weighing powders

Automatically, Quickly, Precisely,

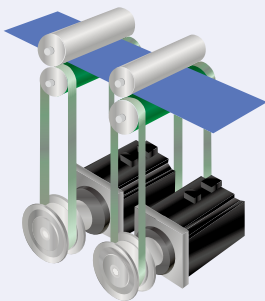


Paper feeding

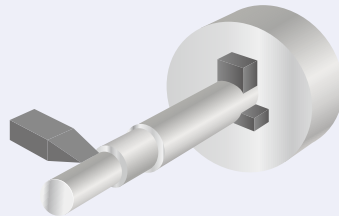


Machining




Index table

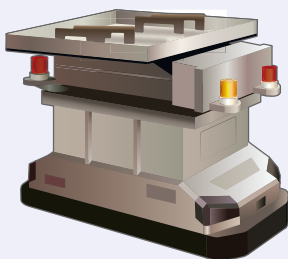

Moving AGVs

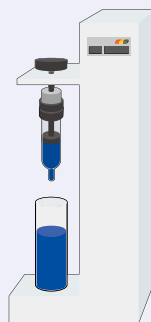

Liquid extraction

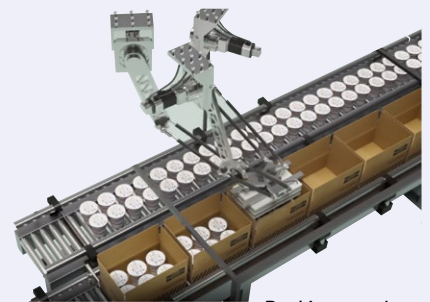

Packing products


SANMOTION motors are the best choice because they can

move a set distance,

at a set speed,

within a set time


- Moving
- Lifting
- Rotating
- Affixing labels
- Gripping
- Pressing
- Pulling
- Injecting
- Inserting
- Processing

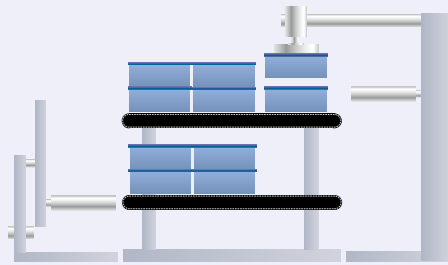

PCB conveying




Reclining

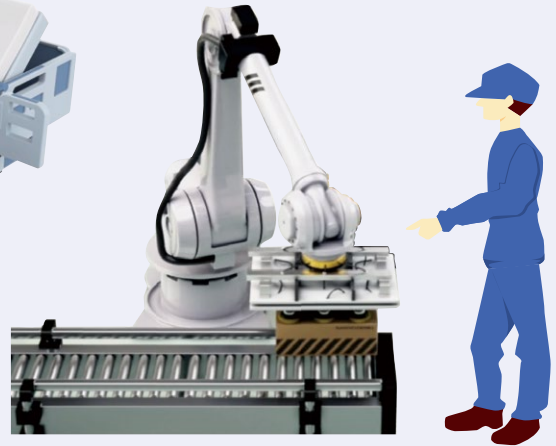


Collaborative robot

and Repeatedly

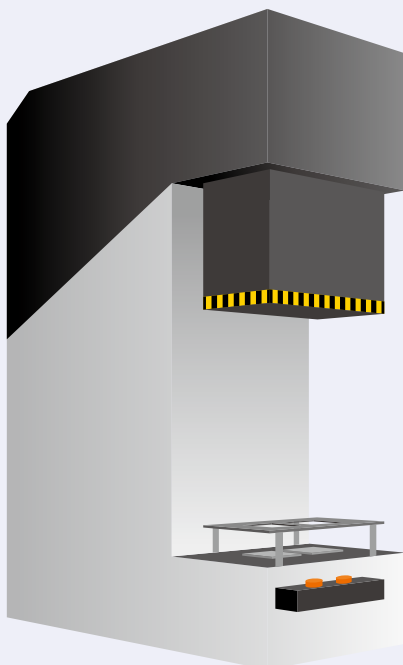


Pressing and punching components

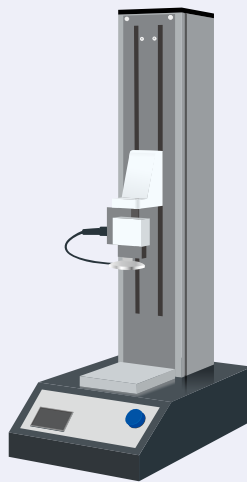


Tensile strength tester



Labeling machine

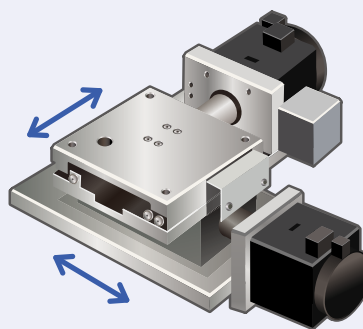

Alignment stage positioning

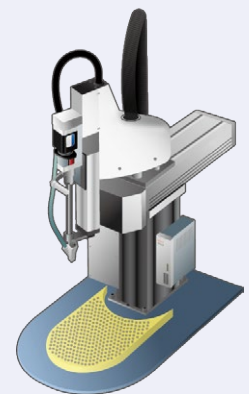

Screw inserting machine

★You can narrow down motors and amplifiers with the **Advanced Search** on our Product Site.

https://products.sanyodenki.com/en/sanmotion/search/ac_servo/



Problem

Want to easily perform positioning control?

Solved!



Simplified stepping systems without encoders

Stepping Systems

- SANMOTION F2 (2-Phase)**
- SANMOTION F3 (3-Phase)**
- SANMOTION F5 (5-Phase)**



Stepping motors are driven precisely at a set angle (basic step angle) according to the number of pulses input to the driver from a pulse oscillator. These use open-loop control without an encoder (position detection sensor), helping build simple and low-cost systems. Ease of use is a key point. In addition, they use holding force when stopped, and feature stable stopping without micro vibrations.

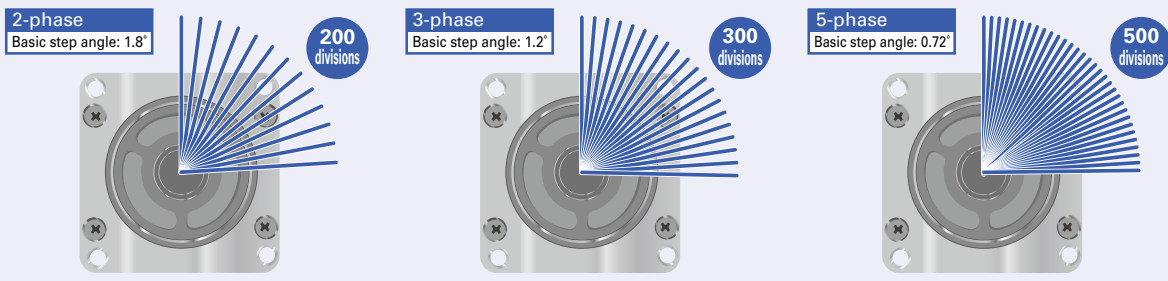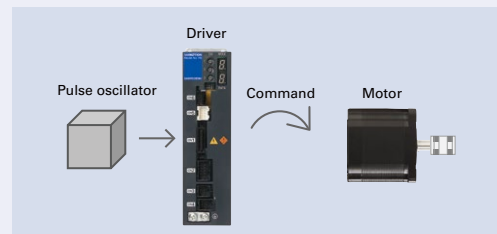


The more phases, the smaller the vibration, and the more precise and smooth motion can be achieved.

Application example: Food manufacturing equipment


With an induction motor

If the viscosity of the material changes due to temperature or humidity, motor speed will be affected and the amount of rotation must be adjusted by an inverter. Startup time is also slow.

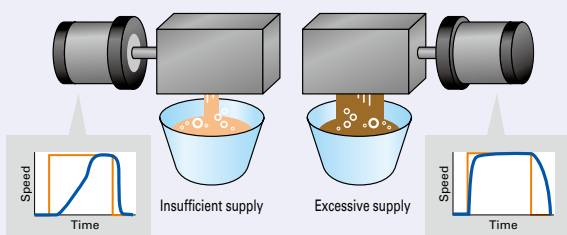

With a stepping motor

This simple system stabilizes the processing quality since it rotates constantly regardless of the state of the material. Startup time is also short.

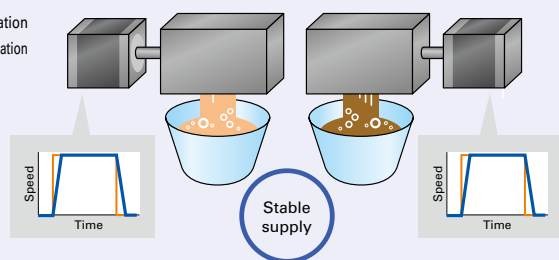

Problem

The step-out and heat generation of stepping systems is a concern. And servo systems are too complicated...

Solved!

Closed-loop control
using encoder-equipped stepping systems


Closed Loop Stepping Systems

SANMOTION Model No.PB




Closed loop stepping systems provide the ease of use of stepping systems and the reliability of servo systems. The stepping motor in these systems has an encoder that provides feedback to the driver to prevent step-out (misalignment), which is a weak point of stepping motors.

In addition, since the current flowing through the motor is controlled to match the device, these systems generate less vibration and heat compared to open loop stepping motors, and can be operated with higher efficiency.

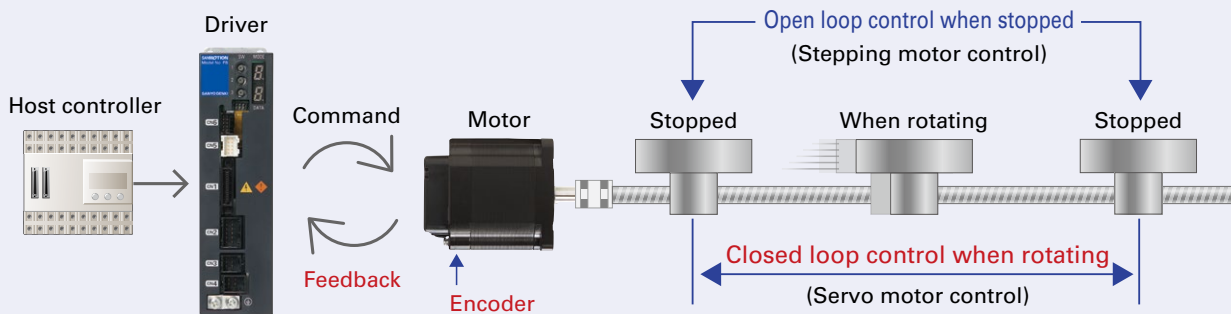

Compared to servo systems


Lower cost
Simpler systems
More stable when stopped

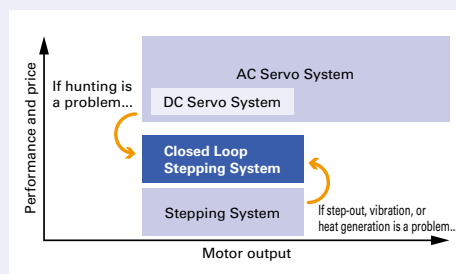


Compared to stepping systems

No step-out
Less vibration
Less heat

Motor speed fluctuation characteristics comparison

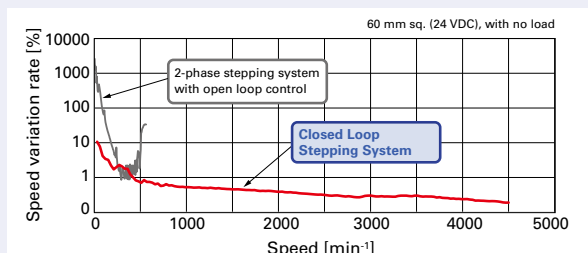

Motor temperature rise

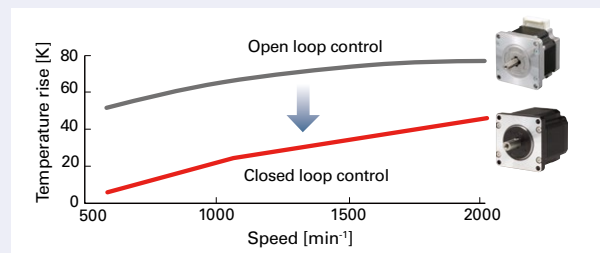

Problem

Want to make your factory automated and IoT-ready?

Solved!

SANMOTION provides comprehensive motion control solutions with servo motors, servo amplifiers, and motion controllers.



AC Servo Systems

SANMOTION R

For servo motors, we offer a wide range of rotary motors from small to large outputs, as well as compact, high-thrust linear servo motors and spindle motors with excellent high-speed rotation that are ideal for machine tool spindles. Our amplifier lineup includes analog/pulse, EtherCAT, and built-in positioning function models. In addition, we have Safety models (with functional safety modules) that can be used with peace of mind for devices and robots that operate near people.



Motion Controller


SANMOTION C S100

The motion controller can accurately control motors with its built-in kinematics such as cartesian robots and SCARA robots.

It is equipped with the EtherCAT interface, and can control a maximum of eight axes. With the 3A Wireless Adapter it can contribute to making equipment IoT-ready, through features such as early detection of equipment malfunctions and use of operating status data.

The SANMOTION comprehensive motion control solutions can increase the productivity of the whole factory.

Comprehensive solution example: SCARA robot control demo

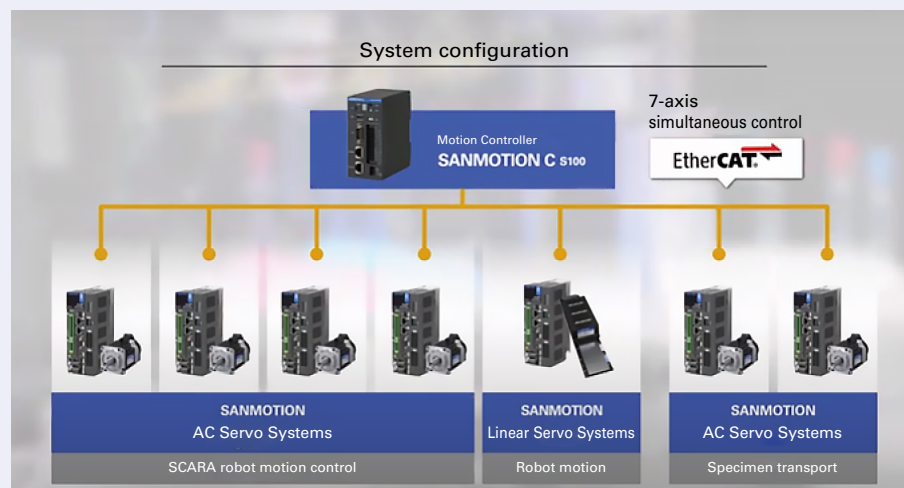

Problem

Want to improve the precision of devices with low-speed driving?

Solved!

DC servo systems that excel in low-speed operation


DC Servo Systems

SANMOTION K




DC servo motors are less susceptible to interference and have less speed fluctuation, so they can provide stable driving even at low speeds.

The lineup has low-voltage models (24 VDC) available which are safe for use in medical equipment and other applications close to people.



Application example:
Coordinate measuring machine

■ Comparison of cogging torque waveforms
Ideal for inspection equipment that moves at low speeds.

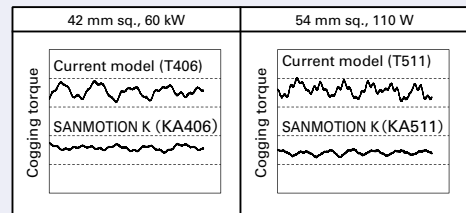

Problem


Want to make a small and simple table mechanism?

Solved!

A custom motor with high thrust load capacity enables direct drive of index tables


Conventionally

Because a standard motor is unable to support the workpiece load directly, the table is indirectly driven using a pulley and timing belt.

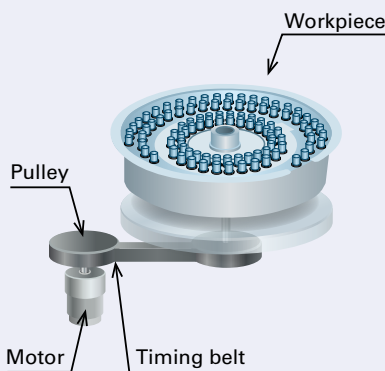

Solution

A customized load-bearing hollow shaft stepping motor directly takes the load of the workpiece and simplifies the mechanism.

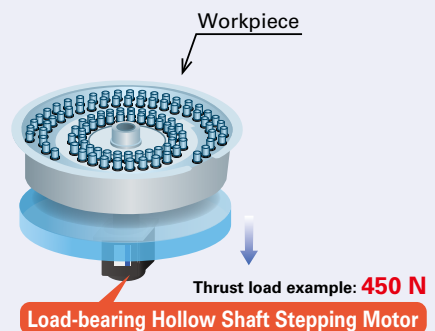


Besides this example, various customizations can be made to best suit your equipment.

Harness Processing

Rotary Damper / Mounting Surface Damper


Shaft Processing

Reduction Gear / Encoder / Brake




DC Fan

The DC Fan lineup has a wide variety of models that feature high airflow and high static pressure

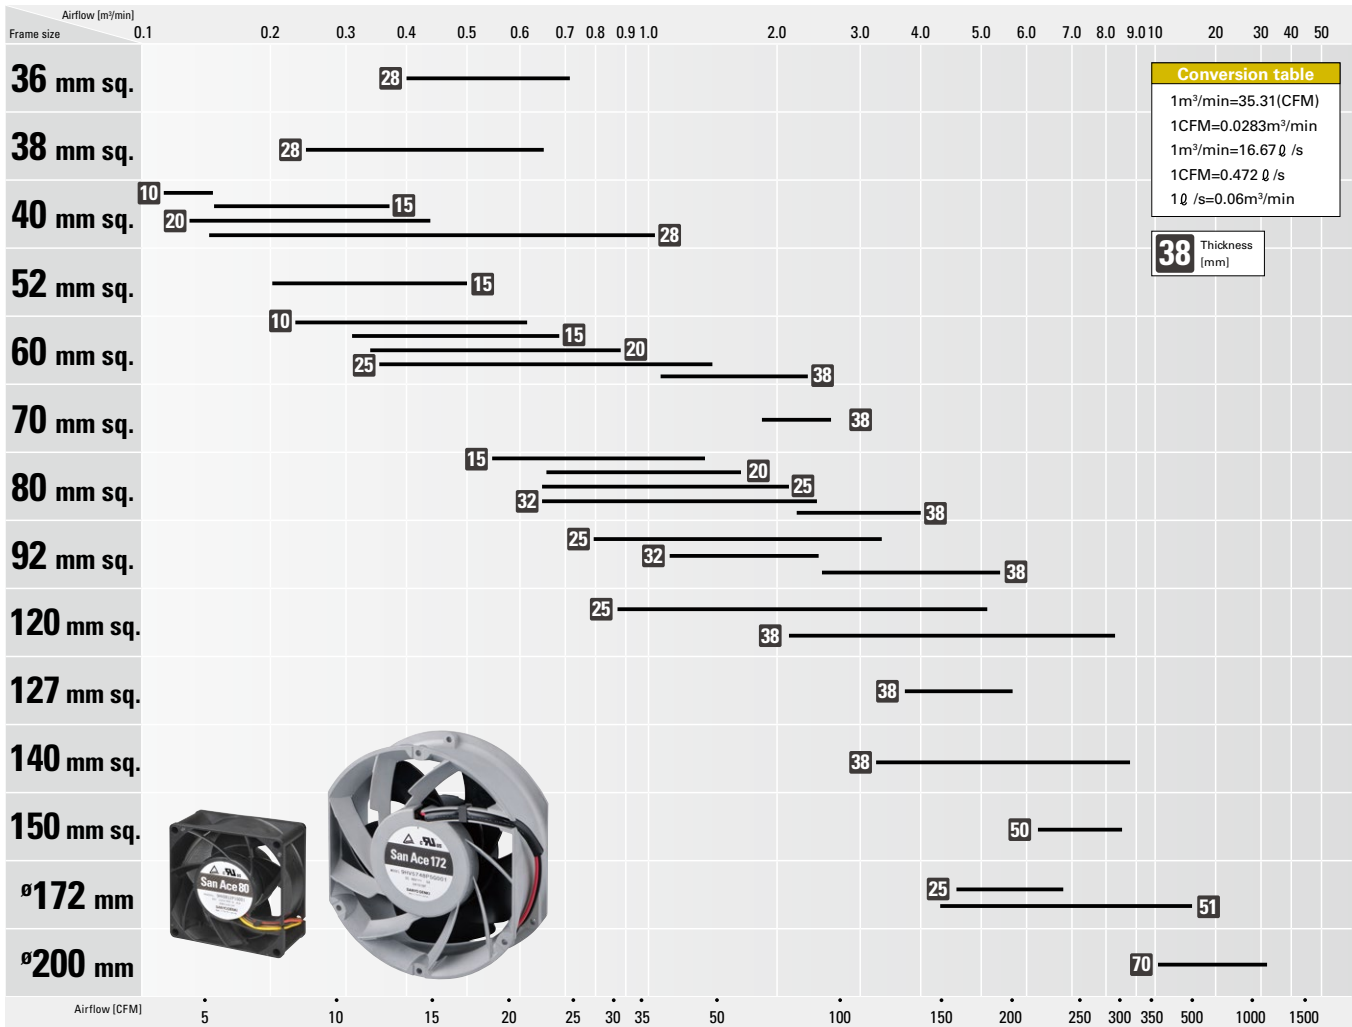

Counter Rotating Fan


Fans that have higher airflow and static pressure than two equally sized DC fans operated in series

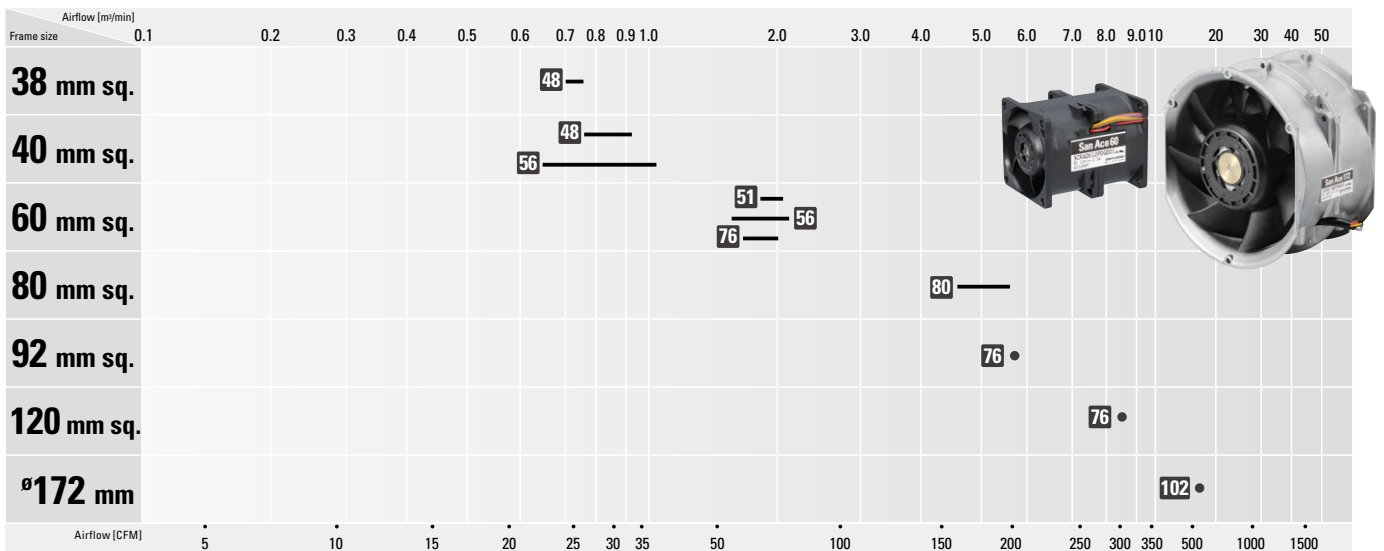

Depending on the model, these sensor options are available. ⇒ **Without sensor** **Pulse sensor** **PWM control function** Please contact your point of sale regarding ⇒ **Lock sensor** **Low-speed sensor**


Reversible Flow Fan

Fans that can blow air in both directions, which can be switched

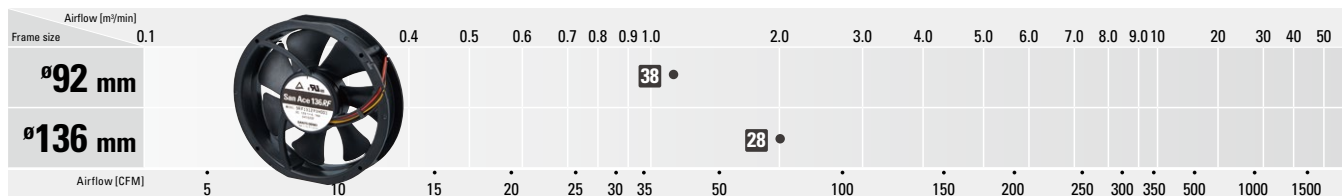


Splash Proof Fan

Fans that feature water and dust protection of up to IP68

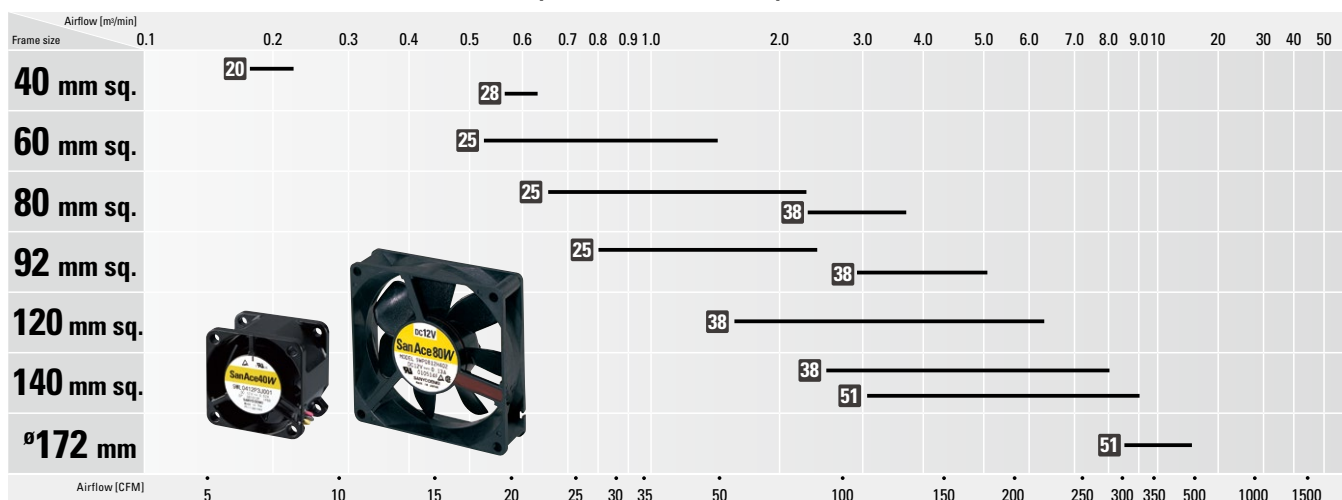


Splash Proof Centrifugal Fan

High static pressure fans that blow air in a centrifugal course and feature water and dust protection of up to IP68

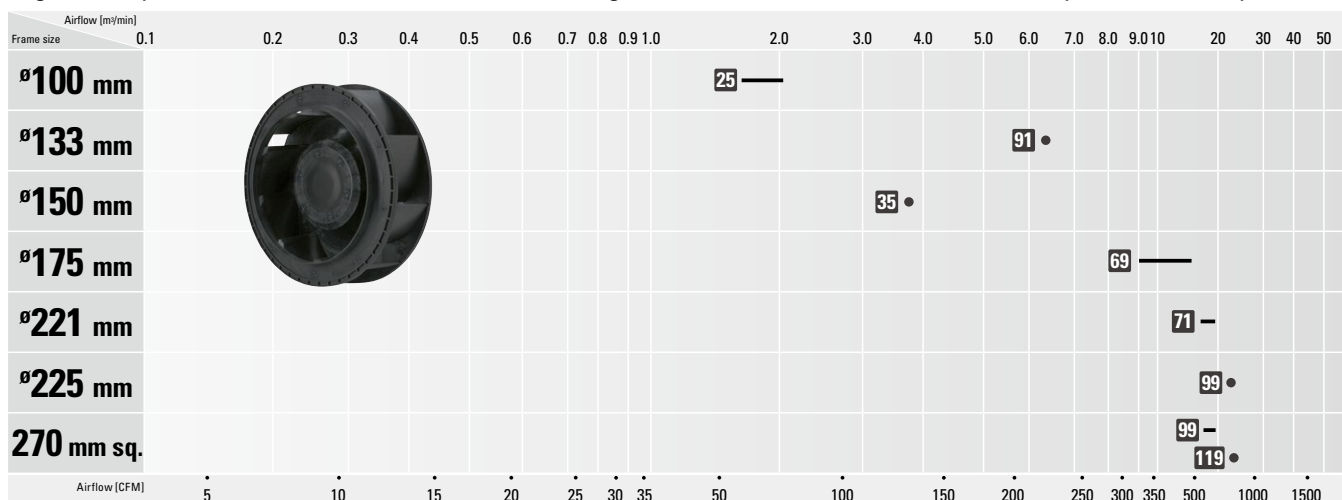


Splash Proof Blower

High static pressure blower fans with IP68-rated water and dust protection

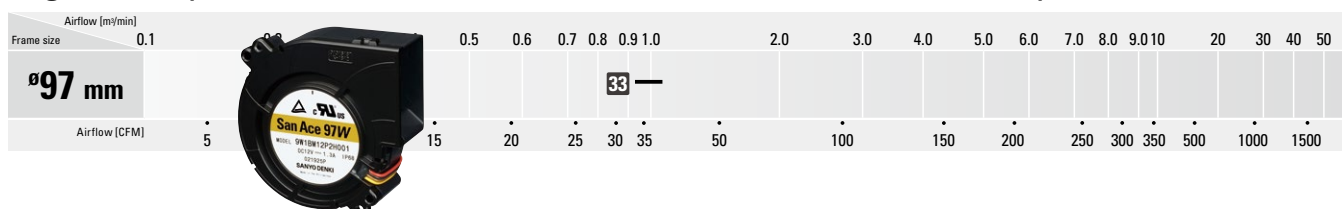


Oil Proof Fan

Fans that can be used in oil mist environments

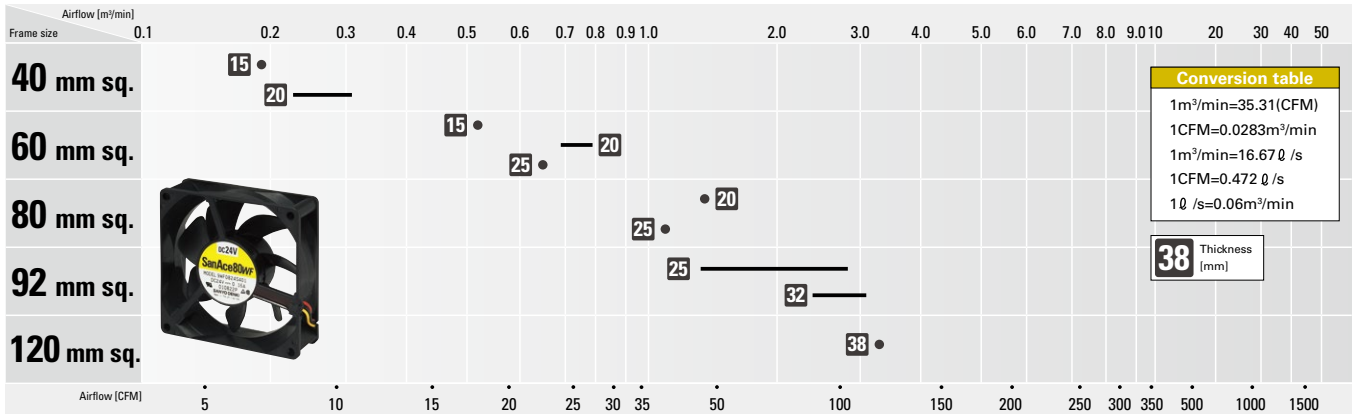


Long Life Fan

Fans with an extended service life of up to 180,000 hours (approx. 20 years)

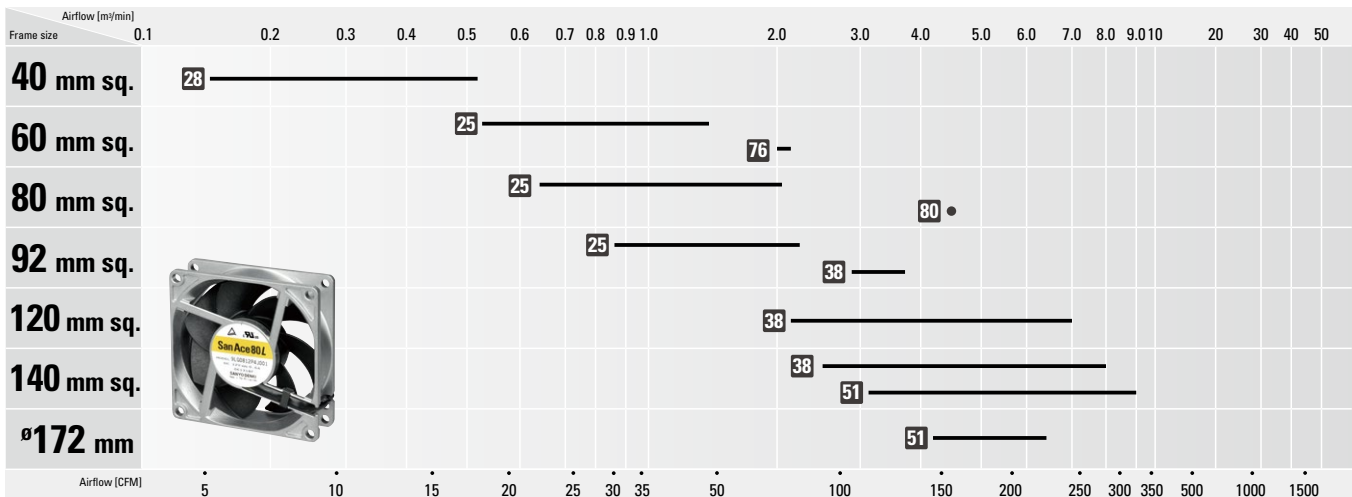


Wide Temperature Range Fan

Fans with a wide operating temperature range of -40°C to +85°C

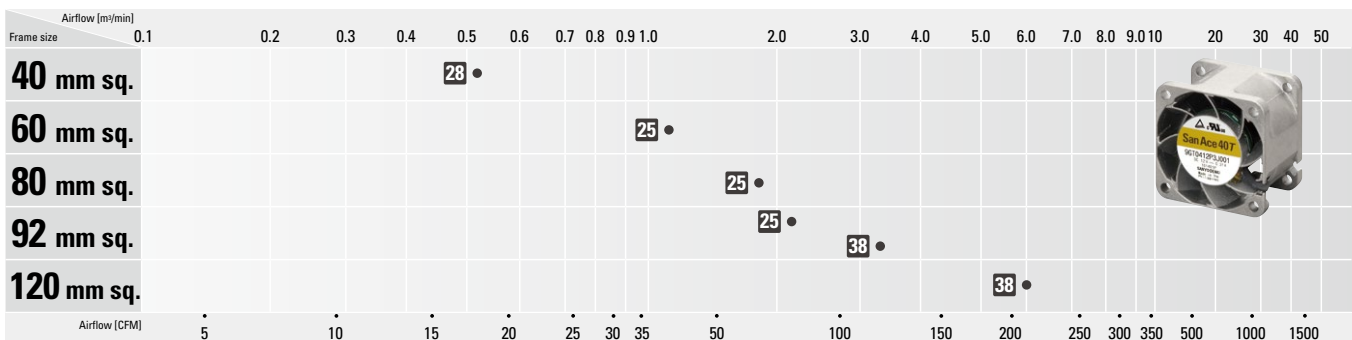


G Proof Fan

Fans that can withstand high levels of G-force

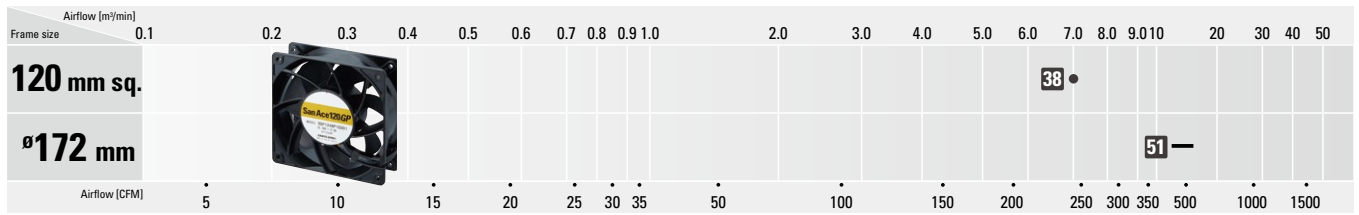


Centrifugal Fan

High static pressure and high airflow fans that blow air in a centrifugal course

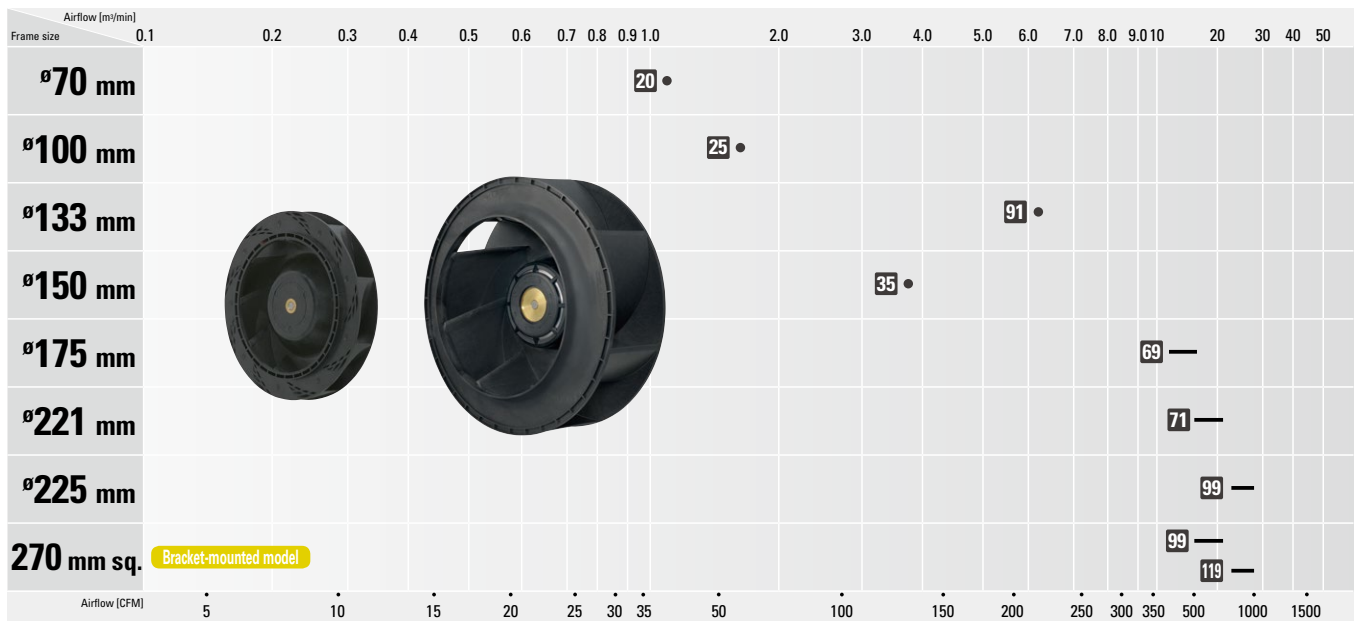


Blower

Fans that are specialized in high static pressure

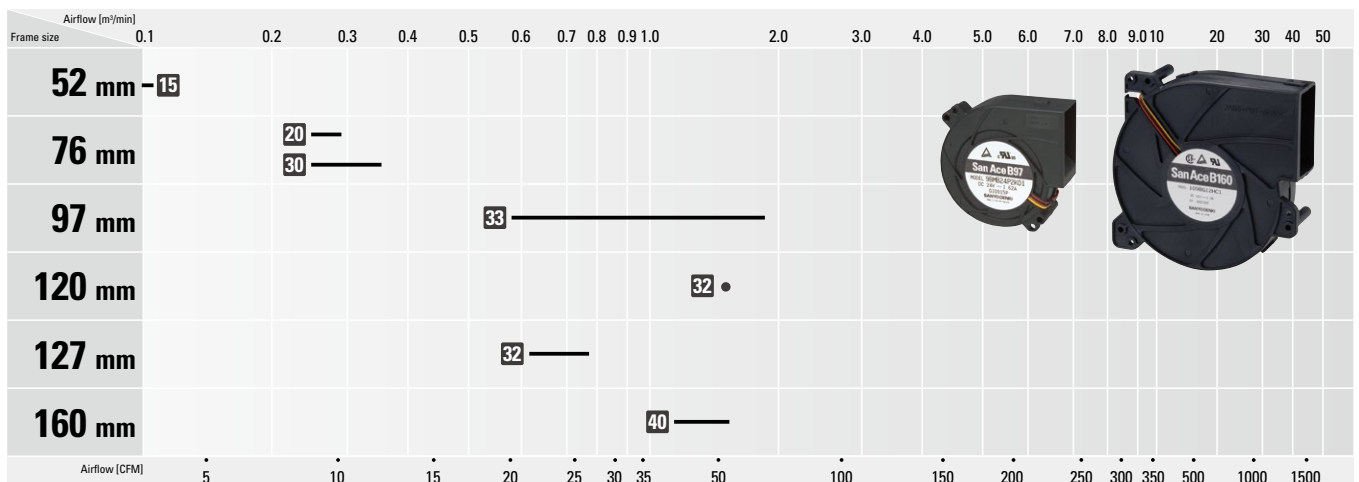


ACDC Fan

AC-powered fans with low power consumption and long service life

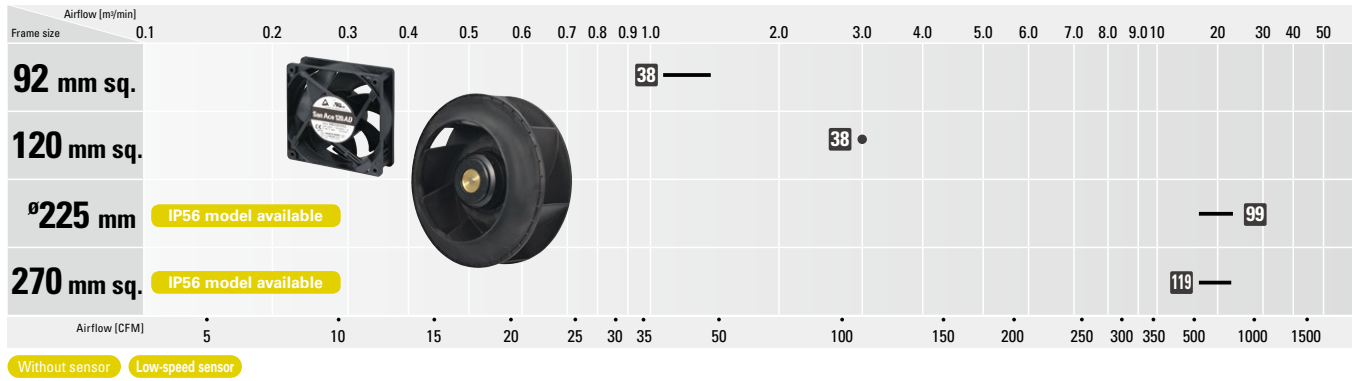


AC Fan

AC-powered cooling fans

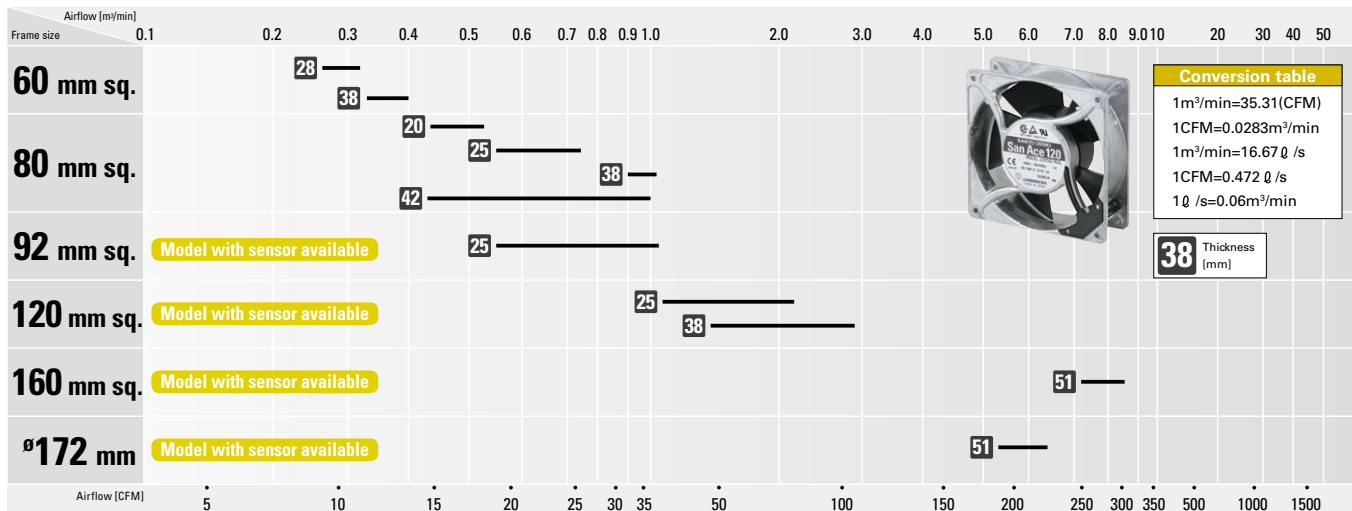

Options

Finger Guards



High-quality finger guards prevent foreign objects from entering the fan, enhancing safety. They do not significantly affect the fan's airflow and static pressure performance and provide stable fan operation.

For 36 to 270 mm sq. fans and ϕ 92 to ϕ 225 mm fans

EMC guards

A piece of metal for protecting fans from electromagnetic noise.
For 80 to 120 mm sq. and ϕ 172 mm DC Fans

Resin finger guards

For 60 to 120 mm sq. fans

Resin filter kits

For 60 to 120 mm sq. fans

Inlet nozzle for Centrifugal Fans and Splash Proof Centrifugal Fans

Equipment to be mounted to the inlet side of fans for adjusting incoming flow of air.

For ϕ 70 to ϕ 225 mm fans

Filter kits, screen kits
For 120 x 120 x 38 mm AC Fans

Plug cords
For 80 to 160 mm sq. and ϕ 172 mm AC Fans

San Ace Controller



It can optimize airflow and static pressure of fans by controlling individual fan speeds. In addition, since the sensor's measurement value can be used for automatic control, it contributes to low noise and energy savings in devices. In addition to connection via the customer's terminal through wireless or wired LAN, remote monitoring and control can be done via a cloud server.

Rated voltage	12/24/48 VDC		
Operating voltage range	7 to 60 VDC		
Operating temperature range	-20 to +70°C		
Control signal	PWM signal, high-level voltage (V _{OH}): 3.3/5 V, frequency: 25 kHz		
Monitoring criteria	Fan speed, fan current, fan uptime, sensor detection value, external input		
Allowable fan connection terminal current	5 A (per terminal)		
Dimensions (W×H×D)	50 × 180 × 135 mm		
Mass	450 g		
Sensor type	Temperature/humidity sensor	Barometer	Accelerometer
Model	9CT1-T	9CT1-P	9CT1-A
Measurement range	Temperature: -20 to +70°C Humidity: 20 to 85% RH ⁽¹⁾	Barometric pressure: 800 to 1100 hPa	Acceleration: 0 to 60 m/s ² (2)
Operating temperature range	-20 to +70°C		
Operating humidity range	20 to 85% RH ⁽¹⁾		
Dimensions (W×H×D)	53 × 22 × 46 mm		
Mass	35 g		

(1) Non-condensing (2) Total acceleration from 3-axes

PWM Controller



You can control the speed of fans with the PWM control function. Contributes to reduced system power consumption and noise.

Type	Box Type	PCB Type
Dimensions (W×H×D)	66×86×38 mm	45×80×17 mm
Rated voltage	12/24/48 VDC	
Power consumption	0.2 W *	
Operating temperature range	-20 to +70°C	
Input terminal	Input voltage range	7 to 60 V
Output terminal	PWM signal output	High-level voltage (V _{OH}): 3.3 or 5 V selectable
	No. of connectable fans	Max. 4
Mounting method	DIN rail mounting or screw mounting	Screw mounting
Mass	110 g	27 g
Material	Case: Plastic	PCB: FR-4

* When output terminals are turned on. Be noted that if applied input voltage or frequency is out of range of the connected fan, how the fan speed responds to the PWM duty cycle may be altered.

Airflow Tester




This compact, portable, and easy-to-operate measuring instrument can measure the system impedance and airflow in devices.

Model no.		9AT2560S-000□*	9AT2560A-000□*	9AT2560C-000□*
Measurement range	Airflow	0.20 to 8.00 m ³ /min	7 to 282 CFM	7 to 282 CFM
	Static pressure	0 to 1,000 Pa	0 to 4.01 inchH ₂ O	0 to 1,000 Pa
Measurement accuracy	Airflow	Within ±7% of maximum airflow measured with each nozzle		
	Static pressure	Within ±10 Pa (0.04 inH ₂ O) of measurements < 200 Pa, Within ±50 Pa (0.20 inH ₂ O) of measurements ≥ 200 Pa		
Operating/storage environment	Ambient temperature	0 to +40°C		
	Humidity	20 to 85% RH (non-condensing)		
Display function	Data no., measurement values (airflow, static pressure**), measurement status, nozzle selection, measurement mode			
Communication protocol	Digital output: Use a dedicated USB cable			
Input power	Input voltage 100 to 240 VAC, 50/60 Hz			
Dimensions (W × H × D)	600 × 250 × 250 mm			
Mass	Main unit: Approx. 6 kg Connection duct (including board holder): Approx. 1.5 kg			

* The AC power plug shape differs with the number in □ of model numbers. AC power plug included in models with 1 in □ is for Japan and North America regions (2 parallel flat pins + a round grounding pin), Input voltage: 100/120 VAC, 50/60 Hz AC power plug included in models with 2 in □ is for Europe region (2 round pins + a female grounding contact), Input voltage: 220 VAC, 50 Hz AC power plug included in models with 3 in □ is for China region (2 angled flat pins + a flat grounding pin), Input voltage: 220 VAC, 50 Hz Product also available without an AC power cable. Model no. 9AT2560S-0000, 9AT2560A-0000, 9AT2560C-0000
** Static pressure in Pa, where standard atmosphere is 1013 hPa at 20°C.

Cooling Fan Units

Examples



- With a variety of fans from our lineup, the optimal cooling fan unit specifically tailored to your needs can be built.
- The pictures above are only a few examples. We are willing to design and develop a custom cooling fan unit optimized for your requests.

Uninterruptible Power Supply (UPS) with Lithium-Ion Batteries

Hybrid UPS

SANUPS E11B-Li



Input/Output	Output capacity			Battery backup time
100/110/115/120 VAC Single-phase 2-wire	1 kVA (0.8 kW)	1.5 kVA (1.2 kW)	2 kVA (1.6 kW)	4 min
200/208/220/230/240 VAC Single-phase 2-wire	1 kVA (0.8 kW)	2 kVA (1.6 kW)		

Online UPS

SANUPS A11M-Li



Input/Output	Output capacity	Battery backup time
100/110/115/120 VAC Single-phase 2-wire	1 to 8 kVA (0.8 to 6.4 kW)	4 min
200/208/220/230/240 VAC Single-phase 2-wire		

Parallel Redundant Configurations

N configuration	2 kVA (1.6 kW)	3 kVA (2.4 kW)	4 kVA (3.2 kW)	5 kVA (4.0 kW)	6 kVA (4.8 kW)	7 kVA (5.6 kW)	8 kVA (6.4 kW)
N+1 configuration	1 kVA (0.8 kW)	2 kVA (1.6 kW)	3 kVA (2.4 kW)	4 kVA (3.2 kW)	5 kVA (4.0 kW)	6 kVA (4.8 kW)	7 kVA (5.6 kW)

Hybrid UPS

SANUPS E11A-Li



Input/Output	Output capacity	Battery backup time
100/110/115/120 VAC Single-phase 2-wire	350 VA (245 W)	8 min

Dimensions [mm]			
Width	Height	Depth	Mass
250	69	365	7 kg

Online UPS

SANUPS A11K-Li



Battery backup time: 8 to 19 min

Input/Output	Output capacity				
100/110/120 VAC Single-phase 2-wire	1 kVA (0.8 kW)	1.5 kVA (1.2 kW)	2 kVA (1.6 kW)	3 kVA (2.4 kW)	5 kVA (4 kW)

Battery backup time and dimensions [mm]

Output capacity [kVA]	Time	Width	Height	Depth	Mass	Output capacity [kVA]	Time	Width	Height	Depth	Mass
1	13 min	191	477	440	17 kg	3	9 min	190	435	625	32 kg
1.5	8 min			488	18 kg						
	19 min			625	27 kg						
2	15 min					5	11 min	234		690	49 kg

Note: Including the vertical stand and floor mounting bracket dimensions



Battery backup time: 30 to 400 min

Input/Output	Output capacity		
100/110/120 VAC Single-phase 2-wire	1.5 kVA (1.2 kW)	3 kVA (2.4 kW)	5 kVA (4 kW)

Battery backup time

Output capacity [kVA]	1.5	3	5
Backup time [min]	100 to 400	50 to 200	30 to 90

Dimensions [mm]

■ Free-standing type

Output capacity [kVA]	Width	Height	Depth	Mass
1.5	317.5	443	520	66 kg
3	365			74 kg
5	409			82 kg

■ Rack mount type

Output capacity [kVA]	Width*	Height**	Depth	Mass**
1.5	480	86 + 175	520	14+52 kg
3		131 + 175		22+52 kg
5		175 + 175		30+52 kg

Note: Including the vertical stand and floor mounting bracket dimensions

* Including rack mounting bracket dimensions
** Height/Mass of UPS unit + battery unit

Standby UPS

SANUPS N11C-Li



Input/Output	Output capacity		
100/110/120 VAC Single-phase 2-wire	1.5 kVA (1.2 kW)	3 kVA (2.4 kW)	5 kVA (4 kW)

Battery backup time

Output capacity [kVA]	1.5	3	5
Backup time [min]	100 to 400	50 to 200	30 to 90

Dimensions [mm]

■ Free-standing type

Output capacity [kVA]	Width	Height	Depth	Mass
1.5	317.5	443	520	66 kg
3	365			74 kg
5	409			82 kg

■ Rack mount type

Output capacity [kVA]	Width*	Height**	Depth	Mass**
1.5	480	86 + 175	520	14+52 kg
3		131 + 175		22+52 kg
5		175 + 175		30+52 kg

Note: Including the vertical stand and floor mounting bracket dimensions

* Including rack mounting bracket dimensions
** Height/Mass of UPS unit + battery unit

Standby UPS

SANUPS N11B-Li



Input/Output	Output capacity		
100/110/120 VAC Single-phase 2-wire	1 kVA (0.8 kW)	1.5 kVA (1.2 kW)	3 kVA (2.4 kW)
200/220/230/240 VAC Single-phase 2-wire	1 kVA (0.8 kW)		

Battery backup time

100 V models			
Output capacity [kVA]	1	1.5	3
Backup time [min]	150	150	30
200 V models			
Output capacity [kVA]	1		
Backup time [min]	100		

Dimensions [mm]


Output capacity [kVA]	Width	Height	Depth	Mass
1 (100 V models)	300	950	250	65 kg
1 (200 V models)	450	950	300	90 kg
1.5				85 kg
3				80 kg

IP65

Uninterruptible Power Supply (UPS)

Hybrid UPS

SANUPS E11B



Input/Output	Output capacity				Battery backup time
100/110/115/120 VAC Single-phase 2-wire	1 kVA (0.8 kW)	1.5 kVA (1.2 kW)	2 kVA (1.6 kW)	3 kVA (2.4 kW)	3 min (5 min)*
200/208/220/230/240 VAC Single-phase 2-wire	1 kVA (0.8 kW)	2 kVA (1.6 kW)	3 kVA (2.4 kW)		

* In parentheses are the values at a load power factor of 0.7.

Dimensions [mm]				
Output capacity [kVA]	Width	Height	Depth	Mass
1	480	86	408 (+8)	15 kg
1.5	480	86	500 (+8)	20 kg
2	480	86	565 (+8)	25 kg
3	480	86	750 (+8)	39 kg

Hybrid UPS

SANUPS E11A



Input/Output	Output capacity			
100/110/115/120 VAC Single-phase 2-wire	0.35 kVA (0.245 kW)	0.75 kVA (0.525 kW)	1 kVA (0.7 kW)	1.5 kVA (1.05 kW)

Battery backup time				
Output capacity [kVA]	0.35	0.75	1	1.5
Standard backup time [min]	6		5	
Available options* [min]	—		20 to 60	

* For 1 to 3 kVA models, except for the tower type, the backup time can be extended by combining optional external battery modules.

Dimensions [mm]									
Standard type					Tower type				
Output capacity [kVA]	Width	Height	Depth	Mass	Output capacity [kVA]	Width	Height	Depth	Mass
0.35	250	69	365	8 kg	0.75	150	250	350	14 kg
0.75	350	86	408	13.5 kg	1			395	17 kg
					1.5			450	22 kg

Online UPS

SANUPS A11K



Input/Output	Output capacity				
100/110/120 VAC Single-phase 2-wire	1 kVA (0.8 kW)	1.5 kVA (1.2 kW)	2 kVA (1.6 kW)	3 kVA (2.4 kW)	5 kVA (4 kW)

Battery backup time					
Output capacity [kVA]	1	1.5	2	3	5
Backup time [min]	10 to 180				10 to 120

Dimensions [mm]											
Vertical type						Rack mount type					
Output capacity [kVA]	Width	Height	Depth	Mass		Output capacity [kVA]	Width	Height	Depth	Mass	
1	191	447	440	22 kg	480	1	86	480	440	22 kg	480
1.5			488	29 kg		488			29 kg		
2			625	40 kg		625			40 kg		
3	190	443	625	58 kg	131	3	175	690	625	58 kg	690
5			234	690		80 kg			5	690	

Note: Including the vertical stand and floor mounting bracket dimensions

Note: Including rack mounting bracket dimensions

Online UPS

SANUPS A11M







 Network support 19-inch rack mountable **3-year warranty**

Input/Output	Output capacity	Battery backup time
100/110/115/120 VAC Single-phase 2-wire	1 to 8 kVA (0.8 to 6.4 kW)	3 min (5 min)*
200/208/220/230/240 VAC Single-phase 2-wire		

* In parentheses are the values at a load power factor of 0.7.

Parallel Redundant Configurations

N configuration	2 kVA (1.6 kW)	3 kVA (2.4 kW)	4 kVA (3.2 kW)	5 kVA (4.0 kW)	6 kVA (4.8 kW)	7 kVA (5.6 kW)	8 kVA (6.4 kW)
N+1 configuration	1 kVA (0.8 kW)	2 kVA (1.6 kW)	3 kVA (2.4 kW)	4 kVA (3.2 kW)	5 kVA (4.0 kW)	6 kVA (4.8 kW)	7 kVA (5.6 kW)

Dimensions [mm]				
	Width	Height	Depth	Mass
UPS unit	480	86	408+8	15 kg

Note: Combine UPS units with a power distribution unit.

Online UPS

SANUPS A11J






 Network support 19-inch rack mountable



Input	Output	Output capacity			
100 VAC or 200 VAC singlephase 2-wire	100 VAC single-phase 2-wire or 100/200 VAC single-phase 3-wire	5 kVA (4.5 kW)		10 kVA (9 kW)	
200 VAC single-phase 2-wire	200 VAC single-phase 2-wire	5 kVA (4.5 kW)	10 kVA (9 kW)	15 kVA (13.5 kW)	20 kVA (18 kW)
	100 VAC single-phase 2-wire or 100/200 VAC single-phase 3-wire				

Parallel redundant operation

Output capacity		
5 kVA (4.5 kW)	10 kVA (9 kW)	15 kVA (13.5 kW)

Single-unit/Parallel operation

Output capacity		
5 kVA (4.5 kW)	10 kVA (9 kW)	20 kVA (18 kW)

Battery backup time		
Standard backup time [min]	5	10
	3U models	4U models
Available options [min]	15 to 180 Note that not all possible combinations of the installation type and output capacity are available.	

Dimensions [mm]					
Output capacity	Battery backup time	Width	Height	Depth*	Mass
5 kVA (single unit)	5 min	435	130	700+30	61 kg
	10 min		351	700+80	113 kg

* Depth of UPS unit + cable cover

●UL/CE certified models

Input	Output	Output capacity			
200 VAC single-phase 2-wire	200 VAC single-phase 2-wire	5 kVA (4.5 kW)	10 kVA (9 kW)	15 kVA (13.5 kW)	20 kVA (17 kW)

Battery backup time	
Standard backup time [min]	5

Dimensions [mm]				
Output capacity	Width	Height	Depth*	Mass
5 kVA	435	130	700+115	61 kg
10 kVA		262	700+121	126 kg

* Depth of UPS unit + cable cover

Uninterruptible Power Supply (UPS)

Online UPS

SANUPS A22A



UPS unit
3-year warranty



400 VAC model

Input	Output	Output capacity
380/400/415 VAC 3-phase 4-wire	380/400/415 VAC 3-phase 4-wire	5 to 105 kVA

200 VAC model

Input	Output	Output capacity
380/400/415 VAC 3-phase 4-wire	220/230/240 VAC Single-phase 2-wire	5 to 55 kVA

Battery backup time

Standard backup time [min]	10
----------------------------	----

Dimensions [mm]

	Width	Height*	Depth	Mass
Cabinet	600	1700 + 100	1000	Approx. 160 kg
(Half-size)	600	1150 + 100	1000	Approx. 125 kg

* Support base height included

Parallel Processing UPS

SANUPS E23A



Input/Output	Output capacity			
200/205/210 VAC 3-phase 3-wire	20 kVA (16 kW)	50 kVA (40 kW)	100 kVA (80 kW)	200 kVA (160 kW)

Battery backup time

Output capacity [kVA]	20	50 to 200
Standard backup time [min]	8	10
Available options [min]	30 to 180	

Dimensions [mm]

Inverter panel

Output capacity [kVA]	Width	Height*	Depth	Mass
20	500	1525	700	400 kg**
50		1775		350 kg
100	750	1950	800	600 kg
200	1500			1200 kg

* Support base height included

** Including the weight of built-in battery

Contact us for battery cabinet dimensions.

Parallel Processing UPS

SANUPS E33A



	Input/Output	Output capacity					
Parallel operation	380/400/415/420 VAC 3-phase 3-/4-wire	100 kVA (90 kW)	200 kVA (180 kW)	300 kVA (270 kW)	400 kVA (360 kW)	500 kVA (450 kW)	600 kVA (540 kW)
Parallel redundant operation		100 kVA (90 kW)	200 kVA (180 kW)	300 kVA (270 kW)	400 kVA (360 kW)	500 kVA (450 kW)	

Battery backup time

Standard backup time [min]	5	10
Available options [min]	30 to 180	

Dimensions [mm]

	Width	Height*	Depth
UPS unit	700	1950	800

* Support base height included

Note 1: See our catalog for the dimensions of I/O panels.

Note 2: Contact us for the dimensions of battery cabinets.

Online UPS

SANUPS A23C



Input/Output
200/210 VAC 3-phase 3-wire

Output capacity		
30 kVA (27 kW)	50 kVA (45 kW)	75 kVA (67.5 kW)
100 kVA (90 kW)	200 kVA (180 kW)	300 kVA (270 kW)

Battery backup time

Standard backup time [min]	10
Available options [min]	5 to 180

Dimensions [mm]

Output capacity [kVA]	Width	Height*	Depth	Mass
30	600	1775	700	320 kg
50				350 kg
75				600 kg
100	800	1950	800	1250 kg
150				1950 kg
200				1950 kg
300	2200	900	1950 kg	

* Support base height included

Note: Contact us for the dimensions of battery cabinets.

Online UPS

SANUPS RMA



Input/Output	Output capacity	
200 VAC 3-phase 3-wire	50 kVA (45 kW)	100 kVA (90 kW)

Battery backup time

Standard backup time [min]	10
Available options [min]	5 to 180

Dimensions [mm]

Inverter panel

Output capacity [kVA]	Width	Height	Depth	Mass
50	1000	1950	900	1100 kg
100	1900			2050 kg

Note 1: Contact us for installation dimensions.

Note 2: For 60 minutes or longer backup times, consult with us.

Note 3: Contact us for the dimensions of battery cabinets.

Voltage Dip Compensator Highly efficient and reliable voltage dip compensator without interruption

SANUPS C23A



Input/Output 210 VAC 3-phase 3-wire	Output capacity		
	10 kVA (8 kW)	20 kVA (16 kW)	30 kVA (24 kW)

Output capacity		
50 kVA (40 kW)	100 kVA (80 kW)	200 kVA (160 kW)

* For 50 to 200 kVA models only

Dip compensation time
1 s

Dimensions [mm]

Output capacity [kVA]	Width	Height**	Depth	Mass
10	500	1525	700	230 kg
20				
30				
50 (CE)	750	1775	700	450 kg
				500 kg
100 (CE)	1050	1950	800	650 kg
				670 kg
200 (CE)	1550	2075		1100 kg
	1650			1200 kg

** Support base height included



SANUPS C33A



Input/Output 420 VAC 3-phase 3-wire	Output capacity	
	150 kVA (120 kW)	300 kVA (240 kW)
Parallel redundant operation	150 kVA (120 kW)	

Dip compensation time
1 s

Dimensions [mm]

Output capacity [kVA]	Configuration
150	UPS unit × 1, EDLC board
300	UPS unit × 2, I/O panel × 1, EDLC board

	Width	Height*	Depth	Mass
UPS unit	700	1950	800	550 kg
I/O panel	1300			1650 kg

* Support base height included

Note: EDLC boards will be designed tailored to your requirements. Contact us for the dimensions and specifications.

Grid Management System Realizes microgrids

SANUPS K23A M type



Input/Output 200 VAC 3-phase 3-wire	Output capacity		
	20 kVA	50 kVA	100 kVA

Dimensions [mm]

Output capacity [kVA]	Width	Height*	Depth	Mass
20	500	1525	700	250 kg
50	800	1775	700	450 kg
100	1050	1950	800	700 kg

* Support base height included

■ Lithium-ion battery

Capacity [kWh]	Width	Height*	Depth	Mass
30 (Indoor model)	1100	1925	700	815 kg
30 (Outdoor model)	1270	2490	900	1015 kg

* Support base height included

Peak Cut Device

Peak shaving system for reducing energy costs in factories

SANUPS K33A



Input		Output	Max. output capacity
Rated voltage	Rated frequency		
380/400/415/420/440 VAC 3-phase 3-wire	50/60 Hz	Direct current	1800 kW

Contact us for dimensional and specification details.

Inverter

Scalable, highly reliable inverter capable of parallel redundant operation

SANUPS D11A



Input	Output	Output capacity		
		Single-unit operation	Parallel operation	Parallel redundant operation
48 VDC	100/120 VAC	1 kVA (1 kW)	2 to 6 kVA (2 to 6 kW)	1 to 5 kVA (1 to 5 kW)

Dimensions [mm]				
	Width	Height	Depth	Mass
Inverter unit	480	43.5	340.6	10 kg
Single-unit operation cabinet			450	10 kg
3-unit parallel operation cabinet			177.5	410.6 (+38)

Note: Contact us for the dimensions of UL/CE certified models.


Static Transfer Switch

Constantly monitors two power sources and shifts from the main to spare without interruption

SANUPS S11A



To AC input of critical loads

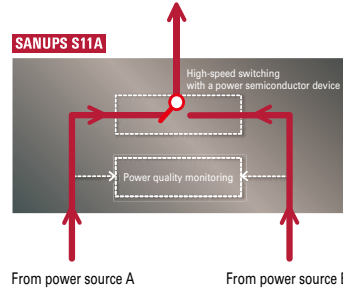

Input/Output	Rated current
100 VAC Single-phase 2-wire	30 A

Dimensions [mm]			
Width	Height	Depth	Mass
480	88	396	10 kg

Networking Products

UPS Management Software

SANUPS SOFTWARE



SANUPS SOFTWARE

Power management of multiple computers connected to a UPS can be implemented.

Model no.	
Windows version for download	PMS52□00DL PMS52□00DL-10 (10 licenses) PMS52□00DL-50 (50 licenses) PMS52□00DL-100 (100 licenses)
Windows version, CD-ROM	PMS52□01 (with cable)
Multi-OS version for download	PMS53□00DL PMS53□00DL-10 (10 licenses) PMS53□00DL-50 (50 licenses) PMS53□00DL-100 (100 licenses)
Multi-OS version, CD-ROM	PMS53□01 (with cable)

(Windows, UNIX, and Linux)

Note: The □'s denote revision characters. For the latest OS support information, see our website.

SANUPS SOFTWARE COMBINATION

Up to 1,000 UPS units can be remotely managed via a network.

Model no.	
Windows version	PMS42D00

Network Power Manager

SANUPS T



Input/Output	Rated current
100 VAC	15 A
200 to 240 VAC	10 A
200 to 240 VAC	20 A (10 A × 2 systems)

Dimensions [mm]			
Width	Height	Depth	Mass
430	46	205	3 to 4 kg

PV Inverter

Grid-connected isolated type

SANUPS P61B



Certified by Japan Electrical Safety & Environment Technology Laboratories (JET)
Registration no.: MP-0180

Input operating voltage range	Rated output voltage	Rated output capacity
60 to 450 VDC	202 VAC Single-phase 3-wire	5.5 kW

- FRT
- IP65
- Output Control

Dimensions [mm]				
Output capacity [kW]	Width	Depth	Height	Mass
5.5	408	205	710	30 kg

Grid-connected type

SANUPS P73J



Certified by Japan Electrical Safety & Environment Technology Laboratories (JET)
Registration no.: MP-0136 (9.9 kW model)
MP-0135 (10 kW model)

Input operating voltage range	Rated output voltage	Rated output capacity
150 to 570 VDC	202 VAC 3-phase 3-wire	9.9/10 kW

- FRT
- IP65
- Output Control

Dimensions [mm]			
Width	Depth	Height	Mass
700	320	600	64 kg

Grid-connected isolated type

SANUPS P73H



Input operating voltage range	Rated output voltage	Rated output capacity
150 to 600 VDC	202 VAC 3-phase 3-wire	10 kW

- FRT
- IP65
- Output Control

Dimensions [mm]			
Width	Depth	Height	Mass
700	320	600	62 kg

Grid-connected isolated charging type/Grid-connected isolated type

SANUPS P73L



Input operating voltage range	Rated output voltage	Rated output capacity
150 to 570 VDC	202 VAC 3-phase 3-wire	10 to 60 kW

- FRT
- Output Control

Dimensions [mm]									
Grid-connected isolated charging type					Grid-connected isolated type				
Output capacity [kW]	Width	Depth	Height*	Mass	Output capacity [kW]	Width	Depth	Height*	Mass
10	650	650	950	190 kg	10	650	650	700	145 kg
20			1250	290 kg	20			1000	220 kg
30			1550	390 kg	30			1300	295 kg
40	1300	1300	1250	580 kg	40	1300	1300	1000	440 kg
50			1550	705 kg	50			1300	540 kg
60			780 kg	60	1300			590 kg	

* Support base height (125 mm) not included

Grid-connected type/Grid-connected isolated type

SANUPS P83E



Input operating voltage range	Rated output voltage	Rated output capacity
240 to 600 VDC	202 VAC 3-phase 3-wire	100 kW

- FRT
- Output Control

Dimensions [mm]				
	Width	Depth	Height	Mass
Grid-connected type	750	800	1950	880 kg
Grid-connected isolated type	1050			1030 kg

Remote Monitoring of PV Systems


PV System Status Monitoring Service

SANUPS PV Monitor Type C



Dimensions [mm]			
Width	Height	Depth	Mass
220	43	153	1 kg

SANUPS NET



This service enables you to remotely monitor the status of photovoltaic power systems via the internet. It makes maintenance easier, providing long-lasting peace of mind.

Power Conditioner for Wind and Hydro Power Generation Systems

Grid-connected type/Grid-connected isolated type

SANUPS W73A



Input operating voltage range	Rated output voltage	Rated output capacity
150 to 570 VDC	202 VAC 3-phase 3-wire	9.9 kW

IP65

Dimensions [mm]			
Width	Depth	Height	Mass
700	320	600	64 kg

Emergency Diesel Generator

SANUPS G53A



Rated output capacity	AC output	Continuous operation time
200/230 kVA (For 50/60 Hz)	200/220 V 3-phase 3-wire	2 hours or more

Dimensions [mm]			
Total length	Width	Height	Mass
4400	1200	2575	3500 kg

Power Generation Vehicle

SANUPS M53A



Vehicle model	Output circuit	Output capacity				[No. of phases/wires] Output voltage	
		At 3-phase		At single-phase		50 Hz	60 Hz
		50 Hz	60 Hz	50 Hz	60 Hz		
Van type	3-/single-phase switchable	20 kVA	25 kVA	11.5 kVA	14.4 kVA	200 V 3-phase 3-wire or 100/200 V single-phase 3-wire	220 V 3-phase 3-wire or 110/220 V single-phase 3-wire
Truck type	3-phase	100 kVA	125 kVA	—	—	210 V 3-phase 3-wire	210 V 3-phase 3-wire

AC Servo Systems

SANMOTION R *3E Model*



Servo amplifiers

Safety

100 VAC: 10 A, 20 A, 30 A

200 VAC: 10 A, 20 A, 30 A, 50 A, 75 A, 100 A, 150 A, 300 A, 600 A

Analog/Pulse

EtherCAT®

Built-in positioning function

Servo motors

Flange size	Rated output
40 mm	30 W, 50 W, 80 W, 90 W, 100 W
60 mm	100 W, 200 W, 360 W, 400 W
80 mm	200 W, 400 W, 750 W
86 mm	750 W, 1 kW
100 mm	750 W, 1 kW, 1.5 kW, 2 kW, 2.5 kW
130 mm	550 W, 1.2 kW, 1.8 kW, 2 kW, 3 kW, 4 kW, 5 kW
180 mm	3.5 kW, 4.5 kW, 5.5 kW, 7.5 kW, 11 kW, 15 kW
220 mm	5 kW, 7 kW, 11 kW, 15 kW, 20 kW, 21 kW
275 mm	30 kW

Encoder: Battery-less absolute encoder and single-turn absolute encoder



Servo amplifiers

Safety

400 VAC: 25 A, 50 A, 100 A, 150 A, 300 A, 800 A

Analog/Pulse

EtherCAT®

Built-in positioning function

Servo motors

Flange size	Rated output
100 mm	750 W, 1 kW, 1.5 kW, 2 kW
130 mm	550 W, 1.2 kW, 1.8 kW, 2 kW, 3 kW
180 mm	3.5 kW, 4.5 kW, 5.5 kW, 7.5 kW, 11 kW, 15 kW
220 mm	11 kW, 15 kW, 20 kW, 21 kW
275 mm	30 kW
320 mm	55 kW

Encoder: Battery-less absolute encoder and single-turn absolute encoder

SANMOTION R *ADVANCED MODEL*



Servo amplifiers

48 VD: 25 A, 40 A

Single-axis: Pulse input

EtherCAT®

Multi-axis: EtherCAT®

Servo motors

Flange size	Rated output
14 mm	2.4 W
20 mm	20 W, 30 W
40 mm	30 W, 50 W, 80 W
60 mm	100 W, 200 W

Encoder: Battery-less absolute encoder and single-turn absolute encoder

Linear Servo Motors



Linear servo motors

Type	Magnet rail width	Rated thrust	Max. thrust
Dual magnet type with core	35 mm	610 N	1400 N
	45 mm	800 N	2200 N
Flat type with core	45 mm	260 N	500 N
Center magnet type with core	30 mm	350 N	650 N

Compatible servo amplifiers: SANMOTION R 3E Model, 200 VAC



Compact cylinder linear servo motors

Motor width	Stroke length	Rated thrust	Max. thrust
12 mm	30 mm	5.1 N	16.5 N
20 mm	50 mm	15 N	50 N

Compatible servo amplifier: SANMOTION R ADVANCED MODEL, 48 VDC

AC Spindle Motors and AC Servo Amplifiers

SANMOTION S



Servo amplifiers

200 VAC: 150 A

Analog/Pulse

EtherCAT®

Spindle motors

Flange size	Rated output
160 mm	3.2 kW, 4.5 kW

DC Servo Systems

SANMOTION K



Servo motors

Flange size	Rated output
42 mm	23 W, 40 W, 60 W
54 mm	60 W, 80 W, 110 W
76 mm	200 W, 300 W
88 mm	400 W, 500 W

Closed Loop Stepping Systems

SANMOTION Model No.PB



Drivers

24/48 VDC Type E (Multi-axis)

EtherCAT®

Motors

Standard motor	Motor size	28 mm, 42 mm, 60 mm
Low backlash gear motor	Motor size	42 mm, 60 mm
	Gear ratio	1:3.6, 1:7.2, 1:10, 1:20, 1:30
Spur gear motor	Motor size	28 mm
	Gear ratio	1:3.6, 1:7.2, 1:10, 1:20, 1:30, 1:50
Harmonic gear motor	Motor size	28 mm, 42 mm, 60 mm
	Gear ratio	1:30, 1:50, 1:100
Electromagnetic brake motor	Motor size	28 mm, 42 mm, 60 mm

Encoder:

Battery-less absolute encoder (for 42 mm and 60 mm motors only) and incremental encoder



Drivers

RS-485 + Parallel I/O

Pulse input

	Power supply	Input type
Type R	Single-phase 100 to 115 VAC, Single-/3-phase 200 to 230 VAC	RS-485 + Parallel I/O
Type P		Pulse input
Type M	24/48 VDC	RS-485 + Parallel I/O Pulse input
Type R (Multi-axis)	24/48 VDC	RS-485 + Parallel I/O
Type P (Multi-axis)	24/48 VDC	Pulse input

Set orders

		AC input driver	DC input driver
Drivers		TypeR, TypeP	Type M, Type R (multi-axis), Type P (multi-axis)
Standard motor	Motor size	42 mm, 60 mm, 86 mm	28 mm, 42 mm, 60 mm
	Low backlash gear motor	Motor size	42 mm, 60 mm
Spur gear motor	Gear ratio	1:3.6, 1:7.2, 1:10, 1:20, 1:30	
	Motor size	—	28 mm
Harmonic gear motor	Gear ratio	—	1:3.6, 1:7.2, 1:10, 1:20, 1:30, 1:50
	Motor size	42 mm, 60 mm	28 mm, 42 mm, 60 mm
Electromagnetic brake motor	Gear ratio	1:30, 1:50, 1:100	
	Motor size	42 mm, 60 mm	28 mm, 42 mm, 60 mm

2-Phase Stepping Systems

SANMOTION F2



Drivers

24/36 VDC Unipolar and bipolar

Pulse input

Stepping motors

Motor size	Basic step angle	Remarks
14 mm	1.8°	Only bipolar available
28 mm	1.8°	
35 mm	1.8°	Only unipolar available
42 mm	1.8°, 0.9°	
50 mm	1.8°	
56 mm	1.8°	
60 mm	1.8°, 0.9°	
86 mm	1.8°	
∅ 86 mm	1.8°	
∅ 106 mm	1.8°	



IP65-rated stepping motors

Waterproof and Dustproof

Motor size	Basic step angle	Remarks
56 mm	1.8°	Only bipolar available
86 mm	1.8°	

3-Phase Stepping Systems

SANMOTION F3



Stepping motors

Motor size	Basic step angle
42 mm	1.2°
50 mm	1.2°
56 mm	1.2°
60 mm	1.2°

5-Phase Stepping Systems

SANMOTION F5



Drivers

Pulse input

	Power supply	Remarks
AC input driver	100 to 120 VAC, 200 to 240 VAC	Microstep
DC input driver	24/36 VDC	Microstep, full/half-step

Stepping motors

Motor size	Basic step angle
28 mm	0.72°
42 mm	
50 mm	
60 mm	
86 mm	

Set orders

		AC input driver	DC input driver
Standard motor	Motor size	42 mm, 60 mm, 86 mm	28 mm, 42 mm, 60 mm, 86 mm
CE/UL-certified motor	Motor size	42 mm, 60 mm, 86 mm	—
Low backlash gear motor	Motor size	42 mm, 60 mm, 86 mm	
	Gear ratio	1:3.6, 1:7.2, 1:10, 1:20, 1:30, 1:36	
Spur gear motor	Motor size	—	28 mm
	Gear ratio	—	1:3.6, 1:7.2, 1:10, 1:20, 1:30, 1:50
Harmonic gear motor	Motor size	42 mm, 60 mm, 86 mm	28 mm, 42 mm, 60 mm, 86 mm
	Gear ratio	1:30, 1:50, 1:100	
Electromagnetic brake motor	Motor size	42 mm, 60 mm, 86 mm	



Linear actuator stepping motors

Motor size	Rated current	Stroke length	Thrust
42 mm	0.75 A/phase	50 mm	370 N
60 mm	1.4 A/phase	80 mm	450 N

Available with or without brake

A stepping motor and ball screw are integrated into one compact unit.

Motion Controller

SANMOTION C S100



Model no.	SMC100-A	SMC100-B
Interface	EtherCAT (100 Mbps) master function, FoE-compatible	
	Ethernet (10/100/1000 Mbps) protocols (Modbus TCP, OPC-UA)	
	RS-485 (9600 to 115200 bps)	
	USB 2.0 (for memory storage)	
Digital I/O	Digital input: 16 points; rated input voltage: 24 VDC; positive/negative common input Digital output: 8 points; load voltage range: 19.2 to 30 VDC; maximum load current: 0.5 A/point; sink output	
Input power supply	Rated voltage: 24 VDC (main power supply, I/O power supply) Voltage range: 19.2 to 30 VDC, 0.8 A (main power supply); 19.2 to 30 VDC, 20 mA (I/O power supply)	
Power consumption	19.2 W	
Max. no. of controllable axes	8	
Control functions	Sequence control Motion control Robot control	Sequence control Motion control (PTP control)
Control language	Programming languages conforming to international standard (IEC 61131-3) G-code (SMC100-A only)	
Dimensions (W × H × D)	55 × 120 × 110 mm	
Mass	300 g	



Peripherals

Wireless Adapter 3A

Model no.	SMC-USBW-01		
Basic specifications	Dimensions (W × H × D)		
	21.8 × 11.5 × 56.5 mm		
	Mass		
	10 g		
	Rated voltage		
	5 VDC		
Functions	Interface		
	USB 2.0 Type A		
	Use with		
	SANMOTION C S100 motion controllers only		
	Operating environment	Ambient temperature	0 to 55°C
		Ambient humidity	10 to 95% (non-condensing)
Wireless standard		Compliant with IEEE802.11b/IEEE802.11g/IEEE802.11n	
Operating frequency band		2.4 GHz band	
Channels		1 to 13 ch	
Maximum communication speed		72.2 Mbps	
Wireless LAN mode		Access point mode (Acting as a master network station) Station mode (Acting as a slave network station)	
Maximum number of connectable units		3 (in access point mode)	
Security		WPA2-PSK (AES)	

EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

SANYO DENKI CO., LTD. 3-33-1 Minami-Otsuka, Toshima-ku, Tokyo 170-8451, Japan TEL: +81 3 5927 1020 <https://www.sanyodenki.com>

The names of companies and/or their products specified in this catalog are the trade names, and/or trademarks and/or registered trademarks of such respective companies.

San Ace, SANUPS, and SANMOTION are trademarks of SANYO DENKI CO., LTD.

Specifications are subject to change without notice.

CATALOG No. K0962B018 '21.4